

4" Housing for Remote Transformer for MR16 Bi-Pin




Features

- 4" Housing with MR16 Socket.
- Lamp: 12V 35W max MR16.
- Lamp Holder: GU5.3 Bi-Pin.
- Thermally protected.
- Can be used with most of the 4" low voltage trims (not included).
- Two side clips secure housing and accommodate various ceiling thickness.

Specifications

|           |             |
|-----------|-------------|
| Wattage   | 35W         |
| Voltage   | 12V         |
| Lamp Type | GU5.3 BiPin |

Dimensions

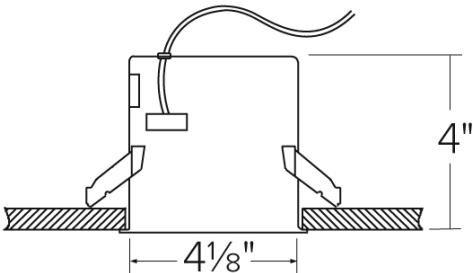

Technical Details

**Installation:** Maximum hole cutout is 4 1/4". Suitable for T-grid and drop ceiling applications. See installation sheet for detailed information.

Electrical:

- Input Voltage: 12V AC (REQUIRES 12V AC Transformer, not included)
- Thermally protected against improper lamping.

**Trims:** Compatible with ELCO 4" MR16 trims.

**Lamp:** Designed for use with GU5.3 MR16 LED lamps.

**Listings:** cUL Listed for Damp Location.

**Warranty:** ELCO Lighting warrants products will be free from defects in materials and workmanship for a period of 3 years.

Product Numbers

| Item | Description                                    | Lamp type   | Watts | Voltage |
|------|------------------------------------------------|-------------|-------|---------|
| E400 | 4" Low Voltage Housing for Remote Transformers | GU5.3 BiPin | 35W   | 12V     |



**ELCO Lighting**

# Dimmer Compatibility Chart

## Low Voltage System

### For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

| Manufacturer | Product                                                                               | Part Number | Dimmed Light Output Range |
|--------------|---------------------------------------------------------------------------------------|-------------|---------------------------|
| Lutron       | Diva (gloss) 450W, single pole, magnetic low voltage dimmer                           | DVLV-600P   | 10% - 100%                |
|              | Maestro (gloss) 600W, single pole or multi-location, incandescent/halogen dimmer      | MA-600      | 10% - 100%                |
|              | Maestro (gloss) 120V, 600W, single pole/multi-location, electronic low voltage dimmer | MAELV-600   | 10% - 100%                |
|              | Maestro 120V, 450W, single pole or multi-location, magnetic low voltage dimmer        | MALV-600    | 10% - 100%                |

\*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.