

4" Ply Sylo™ Pendant

This unique Ply Sylo™ LED Pendant gives you the options you are looking for. Engineered with energy-efficient LED technology and dimming options for your project.




Features

- Modern Pendant Die-Cast aluminum fixture for easy maintenance and upgrades
- Integral EM option 15W Max, for over 15W use EJB4ICA-EM5 external EM and housing
- Available with 120" Field Cuttable Cable or Stems (12", 24", 36", 48", 60", 72" and 84")
- Fits 3 ½" and 4" Octagon and Round Junction boxes
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Soft white lens provides smooth lumen distribution and eliminates LED pixelation
- 90+ CRI for extremely accurate color rendering
- CA Title 24, ETL listed, ENERGY STAR, JA8-2022-E
- Life span of 50,000 hours L70

Specifications


Wattage	12.5, 16, 18W
Lumens	1000, 1250, 1500 lm
Voltage	120V
Color Temp.	2700K, 3000K, 3500K, 4000K, 5000K
Dimmable	Triac/ELV
Lamp Type	LED
CRI	90+
Wet Location	Listed

Options

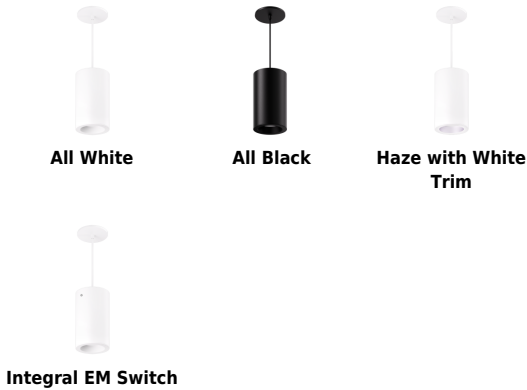

Technical Details

- Optics:** Frosted polycarbonate lens diffuses light evenly throughout while reducing glare with LED Array technology.
- Construction:** Integrated driver and light engine with quick connect. Diecast aluminum body with heat sink allows for efficient cooling. High quality powder coat finish preventing rust and paint cracking.
- Installation:** Included bracket mounts to 3 ½" and 4" Octagon and Round Junction boxes.
- Electrical:** Specifiable in 120V or 120/277V input . High Efficiency driver with a power factor > 0.9. Start time of less than .75 seconds.
- Emergency Battery Backup:** Integral EM Test Switch on Cylinder. The fixture becomes 120V only. Integral EM option 15W Max, for over 15W use EJB4ICA-EM5 external EM and housing
- LED Technology:** Extremely accurate Color Rendering Index of 90+. Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results. Superior Thermal Management by utilizing integrated heat sink. Instant On to Full Brightness technology. No LED pixelation.
- Dimmability:** Optional Triac/ELV or 0-10V dimming. For full list of dimmers, refer to the Dimmer Compatibility List. Industry-leading dimming that dims smoothly with no hot spots or flickering.
- Listings:** cUL Listed for Wet Locations. RoHS Compliant. Meets Energy Star & California Title 24 JA8-2019 standards.
- Warranty:** ELCO Products are built to last with a 5-year Limited Warranty.



Product Number

Item	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Finish
EPD427L3CT5HW	LED	1000, 1250, 1500 lm	2700K, 3000K, 3500K, 4000K, 5000K	12.5, 16, 18	120V	Triac/ELV	Haze with White Ring

Product Number Builder Example: EPD427L3CT5W

4" Ply Sylo™ Pendant	Dimming	Lumen Output (Wattage)	Color Temp.	Color Finish	Length	Optional
EPD4	27 120V, Triac/ELV^{1, 2} 75 120/277V, 0-10V^{3, 4}	L3 up to 1500 lm (18W MAX.)⁵ 10 1000 lumen (15W) ^{1, 6}	CT5 2700K-5000K ⁷	W All White	120" Cable Mount ⁹	No Emergency Battery
				BB All Black ⁸	-12 12" Stem ¹⁰	EM Em. battery 15W MAX. ¹¹
				HW White with Haze Reflector	-24 24" Stem ¹⁰	
					-36 36" Stem ¹⁰	
					-48 48" Stem ¹⁰	
					-60 60" Stem ¹⁰	
					-72 72" Stem ¹⁰	
					-84 84" Stem ¹⁰	

¹ Available as 120V, Triac/ELV

² Lumen Switch: 1000/1250/1500 lm

³ Available as 120/277V, 0-10V/Triac/ELV

⁴ Lumen Switch: 800/1000/1500 lm

⁵ Manual lumen switch located on module

⁶ Available in All White (W) and White/Haze (HW) only

⁷ Manual CCT switch located on module

⁸ All Black (BB) only available in L3 only

⁹ 120 inch field cuttable cable

¹⁰ Stem is not field cuttable

¹¹ Fixture becomes 120V only