

# 4" Ply Sylo™ Pendant

This unique Ply Sylo™ LED Pendant gives you the options you are looking for. Engineered with energy-efficient LED technology and dimming options for your project.




## Features

- Modern Pendant Die-Cast aluminum fixture for easy maintenance and upgrades
- Integral EM option 15W Max, for over 15W use EJB4ICA-EM5 external EM and housing
- Available with 120" Field Cuttable Cable or Stems (12", 24", 36", 48", 60", 72" and 84")
- Fits 3 ½" and 4" Octagon and Round Junction boxes
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Soft white lens provides smooth lumen distribution and eliminates LED pixelation
- 90+ CRI for extremely accurate color rendering
- CA Title 24, ETL listed, ENERGY STAR, JA8-2022-E
- Life span of 50,000 hours L70

## Specifications


|              |                                   |
|--------------|-----------------------------------|
| Wattage      | 9.5, 13.5, 18W                    |
| Lumens       | 850, 1000, 1500 lm                |
| Voltage      | 120/277V                          |
| Color Temp.  | 2700K, 3000K, 3500K, 4000K, 5000K |
| Dimmable     | 0-10V                             |
| Lamp Type    | LED                               |
| CRI          | 90+                               |
| Wet Location | Listed                            |

## Options

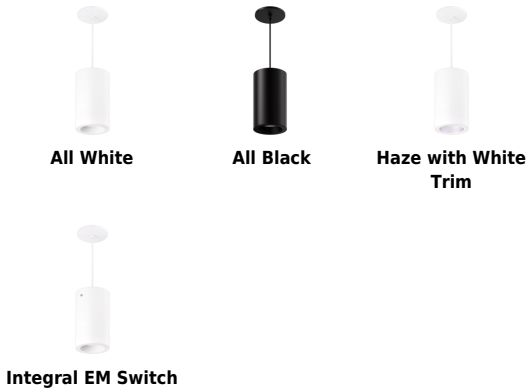

## Technical Details

- Optics:** Frosted polycarbonate lens diffuses light evenly throughout while reducing glare with LED Array technology.
- Construction:** Integrated driver and light engine with quick connect. Diecast aluminum body with heat sink allows for efficient cooling. High quality powder coat finish preventing rust and paint cracking.
- Installation:** Included bracket mounts to 3 ½" and 4" Octagon and Round Junction boxes.
- Electrical:** Specifiable in 120V or 120/277V input . High Efficiency driver with a power factor > 0.9. Start time of less than .75 seconds.
- Emergency Battery Backup:** Integral EM Test Switch on Cylinder. The fixture becomes 120V only. Integral EM option 15W Max, for over 15W use EJB4ICA-EM5 external EM and housing
- LED Technology:** Extremely accurate Color Rendering Index of 90+. Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results. Superior Thermal Management by utilizing integrated heat sink. Instant On to Full Brightness technology. No LED pixelation.
- Dimmability:** Optional Triac/ELV or 0-10V dimming. For full list of dimmers, refer to the Dimmer Compatibility List. Industry-leading dimming that dims smoothly with no hot spots or flickering.
- Listings:** cUL Listed for Wet Locations. RoHS Compliant. Meets Energy Star & California Title 24 JA8-2019 standards.
- Warranty:** ELCO Products are built to last with a 5-year Limited Warranty.



## Product Number

| Item          | Lamp type | Lumens             | CCT                               | Watts         | Voltage  | Dimming | Finish    |
|---------------|-----------|--------------------|-----------------------------------|---------------|----------|---------|-----------|
| EPD475L3CT5BB | LED       | 850, 1000, 1500 lm | 2700K, 3000K, 3500K, 4000K, 5000K | 9.5, 13.5, 18 | 120/277V | 0-10V   | All Black |

Product Number Builder    Example: EPD427L3CT5W

| 4" Ply Sylo™<br>Pendant | Dimming                                                                                                | Lumen Output<br>(Wattage)                                                                                              | Color Temp.                             | Color Finish                                                                                                           | Length                                                                                                                                                                                                                                                                                                                          | Optional                                                                                   |
|-------------------------|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| <div>EPD4</div>         | <div><div>27</div>120V, Triac/ELV<sup>1, 2</sup><br/><div>75</div>120/277V, 0-10V<sup>3, 4</sup></div> | <div><div>L3</div>up to 1500 lm<br/>(18W MAX.)<sup>5</sup><br/><div>10</div>1000 lumen (15W)<br/><sub>1, 6</sub></div> | <div>CT5</div> 2700K-5000K <sup>7</sup> | <div><div>W</div>All White<br/><div>BB</div>All Black<sup>8</sup><br/><div>HW</div>White with Haze<br/>Reflector</div> | <div>120" Cable Mount<sup>9</sup><br/><div>-12</div>12" Stem<sup>10</sup><br/><div>-24</div>24" Stem<sup>10</sup><br/><div>-36</div>36" Stem<sup>10</sup><br/><div>-48</div>48" Stem<sup>10</sup><br/><div>-60</div>60" Stem<sup>10</sup><br/><div>-72</div>72" Stem<sup>10</sup><br/><div>-84</div>84" Stem<sup>10</sup></div> | <div>No Emergency<br/>Battery<br/><div>EM</div>Em. battery 15W<br/>MAX.<sup>11</sup></div> |

<sup>1</sup> Available as 120V, Triac/ELV

<sup>2</sup> Lumen Switch: 1000/1250/1500 lm

<sup>3</sup> Available as 120/277V, 0-10V/Triac/ELV

<sup>4</sup> Lumen Switch: 800/1000/1500 lm

<sup>5</sup> Manual lumen switch located on module

<sup>6</sup> Available in All White (W) and White/Haze (HW) only

<sup>7</sup> Manual CCT switch located on module

<sup>8</sup> All Black (BB) only available in L3 only

<sup>9</sup> 120 inch field cuttable cable

<sup>10</sup> Stem is not field cuttable

<sup>11</sup> Fixture becomes 120V only