


4" Square Sky Panel™

Edge-Lit LED Technology with glare control lens for even glow

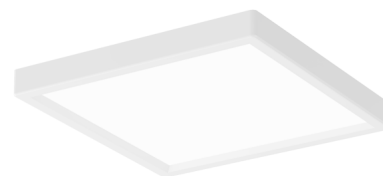

Features

- Fits 3", 3 1/2" and 4" Octagon and Round junction boxes
- Fits 4" housings with optional [ELSPMNT468](#) mounting accessories
- Dimmable to 10% with select dimmers
- Edge-lit LED technology
- IC Rated and Wet Location Rated
- JA8 2022 E-Compliant
- ETL Listed
- 4 3/8" Sq. x 5/8" H

Specifications

Wattage	10W
Lumens	600 lm
Voltage	120V
Color Temp.	2700K, 3000K, 3500K, 4000K, 5000K
Lamp Type	LED
CRI	90+
Wet Location	Listed

Options




White



Black

Dimensions



Product Number

Item	Lamp type	Lumens	CCT	Watts	Voltage	Finish
ELSP44CT5W	LED	600 lm	2700K, 3000K, 3500K, 4000K, 5000K	10W	120V	All White

4" Square Sky Panel™

Color Temp

Finish

ELSP44

30 3000K
40 4000K
CT5 2700K - 5000K


W All White
B All Black

4" Square Sky Panel

Multiplier: 4000K (x 1.08)

PHOTOMETRIC REPORT

Product #: ELSP4430
Wattage/Lumens: 9.4W/ 468 lm
Luminaire LPW: 50 Lm/W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	168
5	167
15	161
25	151
35	135
45	114
55	89
65	60
75	31
85	5
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	10.5	11.6'
6'	4.65	17.4'
8'	2.62	23.1'
10'	1.68	28.9'

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30°	130.35	27.80
0-40°	213.81	45.60
0-60°	377.41	80.60
0-90°	468.49	100.00