


# 4" Square Wall Wash Reflector LED Light Engine Trims

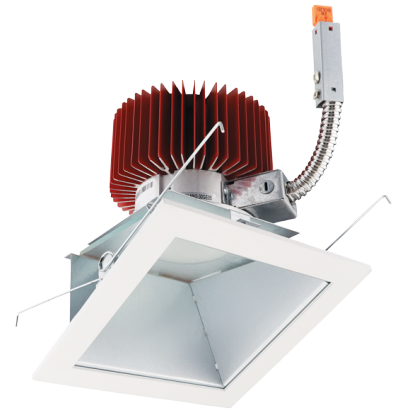


## Features

- Light Engines feature premium LED COB.
- Strong and smooth lumen output.
- Color temperatures from 2700K to 5000K or Sunset Dimming option.
- 2 at the end of the item number denotes Generation 2. Please note Gen 2 and Gen 1 are not cross compatible.

## Specifications

|                     |         |
|---------------------|---------|
| <b>Wattage</b>      | 18W     |
| <b>Lumens</b>       | 1600 lm |
| <b>Color Temp.</b>  | 5000K   |
| <b>Lamp Type</b>    | LED     |
| <b>CRI</b>          | 93+     |
| <b>Wet Location</b> | Listed  |

## Dimensions



## Technical Details

**Optics:** Glass lens diffuses light evenly throughout while reducing glare with LED technology.

**Reflector Construction:** Reflector is one piece, deep, self-flanged construction spun from .05" thick High Grade Aluminum. Reflector allows for minimal glare and a strong glare cut-off.

**Installation:** Must be installed on a Laurel System frame with compatible lumen rating. Frames are available for New Construction, Remodel and as a Retrofit Kit.

### LED Technology:

- Extremely accurate Color Rendering Index of 93+ CRI.
- Efficacy of >90 lumens per watt.
- Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing ELCO Red heat sink.
- Instant On to Full Brightness technology.
- No LED pixilation.

**Sunset:** Sunset color temperature is our dim-to-warm LED technology that allows the color temperature to become warmer as the product is dimmed. Our SUNSET items start at 3000K and go as low as 1800K when dimmed. For Sunset dim technology be sure to order an item with "Sunset" in the Color Temperature (CCT) attribute.

**Listings:** cULus Listed for Wet Location. RoHS Compliant.

**Warranty:** ELCO Products are built to last. 5-year Limited warranty.

## Product Number

| Item               | Lamp type | Lumens  | CCT   | Watts | Finish               |
|--------------------|-----------|---------|-------|-------|----------------------|
| <b>E442L1650H2</b> | LED       | 1600 lm | 5000K | 18W   | Haze with White Trim |

Product Number Builder

Example: E442L0827W2

ELCO 4" Square Wall Wash Reflector

E442L

Lumens

08 850 lm

12 1250 lm

16 1600 lm

20 2000 lm

30 3000 lm

40 4000 lm

Color Temp.

27 2700K (Up to 3000 lm)<sup>1</sup>

30 3000K

35 3500K

40 4000K

50 5000K

SD Sunset<sup>1, 2</sup>

Finish

W All White

H Haze with White Ring

Generation

2 Gen 2

1 Gen 1

Beam Angle

60° lens

-F 38° lens<sup>1</sup>

-N 24° lens<sup>1</sup>

-S 15° lens<sup>1</sup>

<sup>1</sup> Available for lumen packages up to 3000 lm only


<sup>2</sup> Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

# Compatible Products


For use with 4" Laurel™ Square Light Engines



## 4" Laurel™ Commercial Square LED Frames



**E4SQLH**  
**4" Square Architectural Frame**  
\* Hanger bars ordered separately

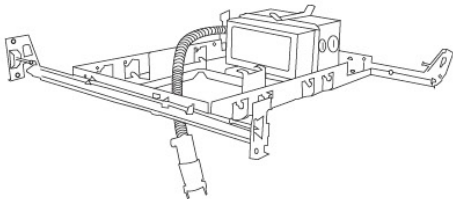

**E4SQLF**  
**4" Square Plaster Frame**

### PRODUCT NUMBER BUILDER

| Frame Type                      | Voltage               | Lumen                 | Dimming                     | Optional                                             | Generation               |
|---------------------------------|-----------------------|-----------------------|-----------------------------|------------------------------------------------------|--------------------------|
| <div>E4SQLH Architectural</div> | <div>U 120/277V</div> | <div>08 850 lm</div>  | <div>D 0-10/Triac/ELV</div> | <div>EM1 Emergency Backup up to 700 lm output</div>  | <div>(Blank) Gen 1</div> |
| <div>E4SQLF Plaster</div>       |                       | <div>12 1250 lm</div> |                             | <div>EM2 Emergency Backup up to 1100 lm output</div> | <div>2 Gen 2</div>       |
|                                 |                       | <div>16 1600 lm</div> |                             |                                                      |                          |
|                                 |                       | <div>20 2000 lm</div> |                             |                                                      |                          |
|                                 |                       | <div>30 3000 lm</div> |                             |                                                      |                          |
|                                 |                       | <div>40 4000 lm</div> |                             |                                                      |                          |