


# 4" Square Wall Wash Reflector LED Light Engine Trims

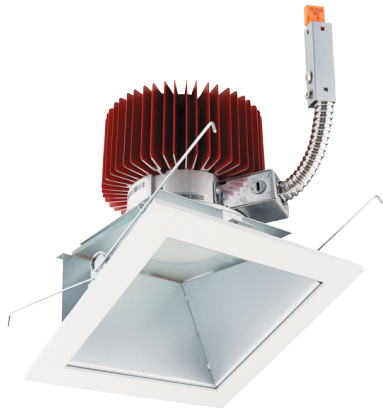


## Features

- Light Engines feature premium LED COB.
- Strong and smooth lumen output.
- Color temperatures from 2700K to 5000K or Sunset Dimming option.
- 2 at the end of the item number denotes Generation 2. Please note Gen 2 and Gen 1 are not cross compatible.

## Specifications

|              |         |
|--------------|---------|
| Wattage      | 21.6W   |
| Lumens       | 2000 lm |
| Color Temp.  | 2700K   |
| Lamp Type    | LED     |
| CRI          | 93+     |
| Wet Location | Listed  |

## Dimensions



## Technical Details

**Optics:** Glass lens diffuses light evenly throughout while reducing glare with LED technology.

**Reflector Construction:** Reflector is one piece, deep, self-flanged construction spun from .05" thick High Grade Aluminum. Reflector allows for minimal glare and a strong glare cut-off.

**Installation:** Must be installed on a Laurel System frame with compatible lumen rating. Frames are available for New Construction, Remodel and as a Retrofit Kit.

### LED Technology:

- Extremely accurate Color Rendering Index of 93+ CRI.
- Efficacy of >90 lumens per watt.
- Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing ELCO Red heat sink.
- Instant On to Full Brightness technology.
- No LED pixilation.

**Sunset:** Sunset color temperature is our dim-to-warm LED technology that allows the color temperature to become warmer as the product is dimmed. Our SUNSET items start at 3000K and go as low as 1800K when dimmed. For Sunset dim technology be sure to order an item with "Sunset" in the Color Temperature (CCT) attribute.

**Listings:** cULus Listed for Wet Location. RoHS Compliant.

**Warranty:** ELCO Products are built to last. 5-year Limited warranty.

## Product Number

| Item        | Lamp type | Lumens  | CCT   | Watts | Finish               |
|-------------|-----------|---------|-------|-------|----------------------|
| E442L2027H2 | LED       | 2000 lm | 2700K | 21.6W | Haze with White Trim |

Product Number Builder

Example: E442L0827W2

ELCO 4" Square Wall Wash Reflector

E442L

Lumens

08

850 lm

12

1250 lm

16

1600 lm

20

2000 lm

30

3000 lm

40

4000 lm

Color Temp.

27

2700K (Up to 3000 lm)<sup>1</sup>

30

3000K

35

3500K

40

4000K

50

5000K

SD

Sunset<sup>1, 2</sup>

Finish

W

All White

H

Haze with White Ring

Generation

2

Gen 2

1

Gen 1

Beam Angle

60° lens

-F

38° lens<sup>1</sup>

-N

24° lens<sup>1</sup>

-S

15° lens<sup>1</sup>

<sup>1</sup> Available for lumen packages up to 3000 lm only


<sup>2</sup> Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

# Compatible Products

For use with 4" Laurel™ Square Light Engines




## 4" Laurel™ Commercial Square LED Frames



E4SQLH

4" Square Architectural Frame

\* Hanger bars ordered separately

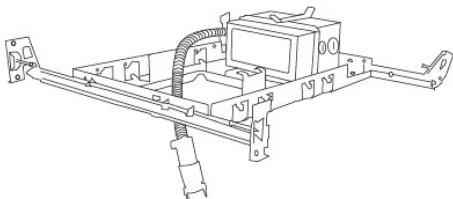

E4SQLF

4" Square Plaster Frame

### PRODUCT NUMBER BUILDER

| Frame Type                      | Voltage               | Lumen                 | Dimming                     | Optional                                             | Generation               |
|---------------------------------|-----------------------|-----------------------|-----------------------------|------------------------------------------------------|--------------------------|
| <div>E4SQLH Architectural</div> | <div>U 120/277V</div> | <div>08 850 lm</div>  | <div>D 0-10/Triac/ELV</div> | <div>EM1 Emergency Backup up to 700 lm output</div>  | <div>(Blank) Gen 1</div> |
| <div>E4SQLF Plaster</div>       |                       | <div>12 1250 lm</div> |                             | <div>EM2 Emergency Backup up to 1100 lm output</div> | <div>2 Gen 2</div>       |
|                                 |                       | <div>16 1600 lm</div> |                             |                                                      |                          |
|                                 |                       | <div>20 2000 lm</div> |                             |                                                      |                          |
|                                 |                       | <div>30 3000 lm</div> |                             |                                                      |                          |
|                                 |                       | <div>40 4000 lm</div> |                             |                                                      |                          |