

8" Reflector LED Light Engine Trims (4000-6000 lm)




Features

- Dimmable Triac/ELV or 0-10V.
- USA Designed and Assembled.
- Frame sold separately (see Compatible Housings).
- 2 at the end of the item number denotes Generation 2.
Please note Gen 2 and Gen 1 are not cross compatible.

Specifications

Wattage	36.8W
Lumens	4000 lm
Color Temp.	3000K
Lamp Type	LED
Beam Angle	60°
CRI	93+
Wet Location	Listed

Options

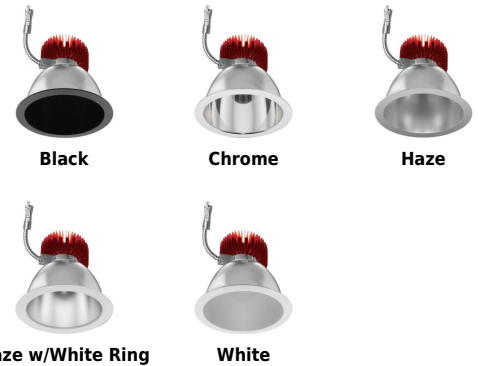

Technical Details

Optics: Frosted polycarbonate lens diffuses light evenly throughout while reducing glare with LED technology.

Reflector Construction: Reflector is one piece, deep, self-flanged construction spun from .05" thick High Grade Aluminum. Reflector allows for minimal glare and a strong glare cut-off.

Installation: Must be installed on a Laurel System frame with compatible lumen rating. Frames are available for New Construction, Remodel and as a Retrofit Kit.

LED Technology:


- Extremely accurate Color Rendering Index of 93+ CRI.
- Efficacy of >90 lumens per watt.
- Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing ELCO Red heat sink.
- Instant On to Full Brightness technology.
- No LED pixilation.

Listings:

- cULus Listed for Wet Location.
- RoHS Compliant.

Warranty: ELCO Products are built to last. 5-year Limited warranty.

Dimensions



Product Number Builder

Example: E810L4030W2

ELCO 8" Reflector

Laurel

Lumens

Color Temp.

Finish

Generation

E810

L

40 4000 lm

60 6000 lm

30 3000K

35 3500K

40 4000K

50 5000K

H All Haze

W All White

B All Black

C All Chrome

HW Haze w/White Ring

Gen 1


2 Gen 2

LED Light Engine

Multiplier: 2700K (x 0.96), 3500K (x 1.04), 4000K (x 1.08), 5000K (x 1.12)

PHOTOMETRIC REPORT

Product #: E810L4030H
Wattage/Lumens: 35.6W/ 3527 Lm
Luminaire LPW: 99 Lm/W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	4094
5	4009
15	3336
25	2510
35	1481
45	182
55	13
65	5
75	1
85	0
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	256	4.6'
6'	114	7.0'
8'	64.0	9.3'
10'	40.9	11.6'

ZONAL LUMEN SUMMARY


Zone	Lumens	% Luminaire
0-30°	2453.47	69.60
0-40°	3329.87	94.40
0-60°	3520.38	99.80
0-90°	3527.05	100.00

LED Light Engine

Multiplier: 2700K (x 0.96), 3500K (x 1.04), 4000K (x 1.08), 5000K (x 1.12)

PHOTOMETRIC REPORT

Product #: E810L6030H
Wattage/Lumens: 70.3W/ 5751 Lm
Luminaire LPW: 82 Lm/W



CANDLE POWER SUMMARY

Degrees Vertical	0°
0	6753
5	6601
15	5447
25	4096
35	2413
45	292
55	23
65	10
75	4
85	0
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	422	4.6'
6'	188	6.9'
8'	106	9.2'
10'	67.5	11.5'

ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
0-30°	4009.32	69.70
0-40°	5431.93	94.50
0-60°	5736.73	99.80
0-90°	5750.7	100.00

Compatible Products

For use with 8" Laurel™ Light Engines




8" Laurel™ Commercial LED Frames




8" Architectural Frame
E8LH



8" Plaster Frame
E8LF



8" Remodel Frame
E8LR



8" Retrofit Kit
E8LT

PRODUCT NUMBER BUILDER

Frame Type	Voltage	Lumen	Dimming	Optional		Generation		
E8LH Architectural	U 120/277V	08 850 lm	D Triac/ELV/0-10V	EM1	Emergency Backup up to 700 lm output	(blank)	Gen 1	
E8LF Plaster		12 1250 lm	S Sunset	EM2	Emergency Backup up to 1100 lm output	2	Gen 2	
E8LR Remodel		16 1600 lm	L Lutron					
E8LT Retrofit		20 2000 lm						
		30 3000 lm						
		40 4000 lm						
		60 6000 lm						