


# 8" Square Sky Panel™

Edge-Lit Technology with glare control lens for even glow

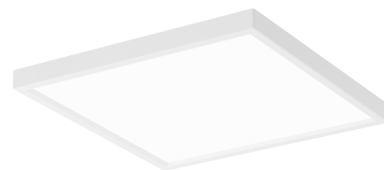

## Features

- Fits 3 1/2" and 4" Octagon and Round Junction boxes
- Fits 4" and 6" Housings with optional mounting accessories
- Dimmable to 10% with select dimmers
- Edge-lit LED technology with glare control lens
- IC Rated and Wet Location Rated
- JA8 2022 E-Compliant
- ETL Listed

## Specifications

|                    |                                   |
|--------------------|-----------------------------------|
| <b>Wattage</b>     | 18W                               |
| <b>Lumens</b>      | 1200 lm                           |
| <b>Voltage</b>     | 120V                              |
| <b>Color Temp.</b> | 2700K, 3000K, 3500K, 4000K, 5000K |
| <b>Dimmable</b>    | Triac/ELV                         |
| <b>Lamp Type</b>   | LED                               |

## Options




White



Black

## Dimensions



## Product Numbers

| Item              | Lamp type | Lumens  | CCT                               | Watts | Voltage | Dimming   | Finish    |
|-------------------|-----------|---------|-----------------------------------|-------|---------|-----------|-----------|
| <b>ELSP88CT5W</b> | LED       | 1200 lm | 2700K, 3000K, 3500K, 4000K, 5000K | 18W   | 120V    | Triac/ELV | All White |
| <b>ELSP88CT5B</b> | LED       | 1200 lm | 2700K, 3000K, 3500K, 4000K, 5000K | 18W   | 120V    | Triac/ELV | All Black |

8" Square Sky Panel™

CCT

Finish

ELSP88

CT5 2700K - 5000K


W All White  
B All Black

8" Square Sky Panel

Multiplier: 3000K (x 0.92)

PHOTOMETRIC REPORT

Product #: ELSP8840  
Wattage/Lumens: 19.5W/ 1175 lm  
Luminaire LPW: 60Lm/W



CANDLE POWER SUMMARY

| Degrees Vertical | 0°  |
|------------------|-----|
| 0                | 419 |
| 5                | 412 |
| 15               | 399 |
| 25               | 365 |
| 35               | 321 |
| 45               | 268 |
| 55               | 202 |
| 65               | 135 |
| 75               | 67  |
| 85               | 0   |
| 90               | 0   |

ILLUMINANCE AT A DISTANCE

| Distance to Target Plane | Footcandles Beam Center | Beam Diameter |
|--------------------------|-------------------------|---------------|
| 4'                       | 26.2                    | 11.7'         |
| 6'                       | 11.6                    | 17.5'         |
| 8'                       | 6.54                    | 23.4'         |
| 10'                      | 4.19                    | 29.2'         |

ZONAL LUMEN SUMMARY

| Zone  | Lumens  | % Luminaire |
|-------|---------|-------------|
| 0-30° | 323.71  | 27.60       |
| 0-40° | 530.87  | 45.20       |
| 0-60° | 938.11  | 79.90       |
| 0-90° | 1174.71 | 100.00      |