

# Pex™ 3" Round Adjustable Reflector Wall Wash

Pex™ precision die-cast adjustable trims with Twist-On system for easy Koto™ Module installation



## Features

- 3" Round Adjustable Reflector Wall Wash.
- 45° Adjustability
- 4 3/8" O.D.
- Convenient twist-on design for easy installation.
- Damp Location Rated.
- Lamp: Koto™ LED Module.
- Recommended to be used with Maximum Adjustability Housings


## Technical Details

**Construction:** Diecast aluminum with a powder coated finish.

**Installation:** Twist-on design allows for easy mounting onto the Koto™ LED Module.

**Lamp:** Koto™ LED Module.

## Dimensions

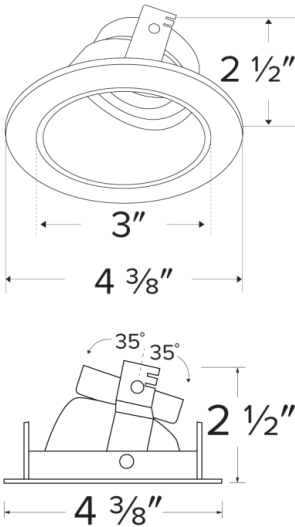

## Product Numbers

| Item     | Finish    |
|----------|-----------|
| ELK3622W | All White |

## Product Number Builder Example: ELK3622W

Pex™ 3" Round Adjustable Reflector Wall Wash

Finish

**ELK3622**


**W** All White

# Compatible Products

For use with 3" Koto™ Twist-On Trims



## Koto™ LED Module & 3" Dedicated LED ICA Housing



Koto™ LED Module  
ELK07 - ELK09


| PRODUCT NUMBER BUILDER |        |                   |                             |                             |
|------------------------|--------|-------------------|-----------------------------|-----------------------------|
| Koto™ LED Module       | Lumens | Color Temperature | Beam Angle                  |                             |
| ELK                    |        |                   |                             |                             |
| 07                     | 750 lm | 27                | 2700K                       | (blank) 38° lens (Standard) |
| 09                     | 950 lm | 30                | 3000K                       | -S 18° lens                 |
|                        |        | 35                | 3500K                       | -N 25° lens                 |
|                        |        | 40                | 4000K                       | -W 60° lens                 |
|                        |        | SD                | Sunset Dimming (ELK09 Only) |                             |



3" ICA Maximum Adjustability Housing  
**New Construction**

| CAT NO.  | SPECIFICATIONS        |
|----------|-----------------------|
| EL386ICA | Maximum Adjustability |

## Koto™ Architectural LED Light Engine & 3" Architectural ICA Housings



Koto™ LED Light Engine  
ELK19 - ELK21


| PRODUCT NUMBER BUILDER |                |                   |                             |                             |
|------------------------|----------------|-------------------|-----------------------------|-----------------------------|
| Koto™ LED Light Engine | Lumens         | Color Temperature | Beam Angle                  |                             |
| ELK                    |                |                   |                             |                             |
| 19                     | 750 - 850 lm   | 27D               | 2700K                       | (blank) 38° lens (Standard) |
| 21                     | 1100 - 1500 lm | 30D               | 3000K                       | -S 18° lens                 |
|                        |                | 35D               | 3500K                       | -N 25° lens                 |
|                        |                | 40D               | 4000K                       | -W 60° lens                 |
|                        |                | SD                | Sunset Dimming (ELK19 Only) |                             |



3" High Lumen Maximum Adjustability ICA Housing  
1500 lm (18.9W) w/ELK21 Series Module  
Not for use with ELK19 Series Module

**New Construction**

| CAT NO.    | SPECIFICATIONS             |
|------------|----------------------------|
| E3LK85ICAD | 120/277V - 0-10V/Triac/ELV |



3" Shallow Maximum Adjustability ICA Housing  
850 lm (14.7W) w/ELK19 Series Module  
1100 lm (14.7W) w/ELK21 Series Module

**New Construction**

| CAT NO.    | SPECIFICATIONS             |
|------------|----------------------------|
| E3LK76ICA  | 120V - Triac/ELV           |
| E3LK77ICAD | 120/277V - 0-10V/Triac/ELV |

### ACCESSORIES FOR KOTO™ LED MODULE & KOTO™ ARCHITECTURAL LED LIGHT ENGINE



#### Lens

|        |          |
|--------|----------|
| EP731C | 18° Lens |
| EP732C | 25° Lens |
| EP733C | 38° Lens |
| EP734C | 60° Lens |

\*EP732C, EP733C, EP734C Included



#### Reflectors

|        |     |
|--------|-----|
| EP735C | 15° |
| EP736C | 25° |
| EP737C | 38° |
| EP738C | 60° |



#### Secondary Optics

|     |               |     |                  |
|-----|---------------|-----|------------------|
| L45 | Hex Louver    | L51 | Color Shifter    |
| L46 | Linear Louver | L57 | White Hex Louver |
| L47 | Spread Louver | L52 | Blue Lens        |
| L49 | Frosted Lens  | L53 | Pink Shifter     |



#### Snoot


|      |       |
|------|-------|
| L50W | White |
| L50B | Black |

# Compatible Products

For use with 3" Koto™ Twist-On Trims



## Koto™ 24V DC LED Light Engine



24V DC Koto™ LED  
Light Engine

| PRODUCT NUMBER BUILDER    |           |                      |  |            |
|---------------------------|-----------|----------------------|--|------------|
| Koto™ LED<br>Light Engine | Lumens    | Color<br>Temperature |  | Voltage    |
| ELK                       |           |                      |  |            |
|                           | 08 800 lm | 27 2700K             |  | -24 24V DC |
|                           |           | 30 3000K             |  |            |

*\*Standard module includes 38° installed with 25° & 60° field changeable lenses.*

### ACCESSORIES



#### Lens

EP731C 18° Lens  
EP732C 25° Lens  
EP733C 38° Lens  
EP734C 60° Lens

*\*EP732C, EP733C, EP734C  
Included with standard module*



#### Snoot


L50W White  
L50B Black



#### Secondary Optics

L45 Hex Louver  
L46 Linear Lens  
L47 Spread Louver  
L49 Frosted Lens  
L51 Color Shifter  
L57 White Hex Louver  
L52 Blue Lens  
L53 Pink Shifter

## 3" Koto™ Dedicated LED ICA Housings (24V DC Input)



24V DC 3" ICA Maximum Adjustability Housing  
New Construction

| CAT NO.    | SPECIFICATIONS        |
|------------|-----------------------|
| E24V386ICA | Maximum Adjustability |

*\*Requires 24V DC Transformer*