


Pex™ Precision die-cast trims with twist-on system for easy tool-free installation

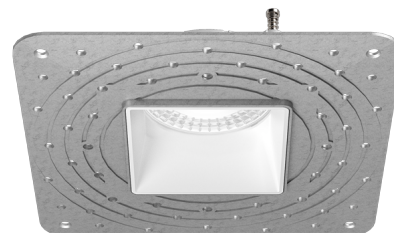

- 3" Square Adjustable Trimless Reflector (ELK381).
- 3" Trimless Spackle Frame Ordered Separately (EL03SFS).
- 35° Adjustability.
- Convenient twist-on design for easy installation.
- Damp Location Rated.
- Lamp: Koto™ LED Module and Canless Koto™ LED Module

**Installation:** Twist-On design allows for easy mounting onto the Koto™ LED Module.

**Lamp:** Koto™ LED Module and Canless Koto™ LED Module.

**Listings:** Damp Location Rated.



**ELK381 - White  
Adj. Reflector**



**ELK381 - Haze Adj.  
Reflector**



**K381 - Black Adj.  
Reflector**



### EL03SFS - Spackle Frame




| Item           | Description                             | Finish    |
|----------------|-----------------------------------------|-----------|
| <b>ELK381W</b> | 3" Square Adjustable Trimless Reflector | All White |
| <b>ELK381H</b> | 3" Square Adjustable Trimless Reflector | All Haze  |
| <b>ELK381B</b> | 3" Square Adjustable Trimless Reflector | All Black |
| <b>EL03SFS</b> | 3" Square Trimless Spackle Frame        |           |

# Compatible Products

For use with 3" Koto™ Twist-&-Lock Trimless



## Koto™ LED Module



**Koto™ LED Module**  
ELK07, ELK09, & ELK11

| PRODUCT NUMBER BUILDER |         |                   |                                    |            |                                   |
|------------------------|---------|-------------------|------------------------------------|------------|-----------------------------------|
| Koto™ LED Module       | Lumens  | Color Temperature |                                    | Beam Angle |                                   |
| ELK                    |         |                   |                                    |            |                                   |
| 07                     | 750 lm  | 27                | 2700K                              | (blank)    | 38° lens (Standard)               |
| 09                     | 950 lm  | 30                | 3000K                              | -S         | 18° lens                          |
| 11                     | 1150 lm | 35                | 3500K                              | -N         | 25° lens                          |
|                        |         | 40                | 4000K                              | -W         | 60° lens                          |
|                        |         | SD                | Sunset Dimming (For ELK09 & ELK11) | -FC        | 18° - 50° Adjustable (ELK07 Only) |

### ACCESSORIES



#### Lens

**EP731C** 18° Lens  
**EP732C** 25° Lens  
**EP733C** 38° Lens  
**EP734C** 60° Lens

*\*EP732C, EP733C, EP734C Included*



#### Snoot

**L50W** White  
**L50B** Black



#### Secondary Optics


**L45** Hex Louver  
**L46** Linear Lens  
**L47** Spread Louver  
**L49** Frosted Lens  
**L51** Color Shifter

**Koto™ LED Module with 5-CCT Switch**

**Product Number**

**ELK08CT5** 825 lm  
**ELK10CT5** 1000 lm

## 3" Koto™ Dedicated LED ICA Housings



3" ICA Maximum Adjustability Housing  
**New Construction**


| CAT NO.  | SPECIFICATIONS        |
|----------|-----------------------|
| EL386ICA | Maximum Adjustability |

# Compatible Products

For use with 3" Koto™ Twist-&-Lock Trimless



## Koto™ Architectural LED Light Engine



Koto™ LED Light Engine  
ELK19 - ELK21

| PRODUCT NUMBER BUILDER |                |                                |                                       |
|------------------------|----------------|--------------------------------|---------------------------------------|
| Koto™ LED Light Engine | Lumens         | Color Temperature              | Beam Angle                            |
| ELK                    |                |                                |                                       |
| 19                     | 750 - 850 lm   | 27D 2700K                      | (blank) 38° lens (Standard)           |
| 21                     | 1100 - 1500 lm | 30D 3000K                      | -S 18° lens                           |
|                        |                | 35D 3500K                      | -N 25° lens                           |
|                        |                | 40D 4000K                      | -W 60° lens                           |
|                        |                | SD Sunset Dimming (ELK19 Only) | -FC 18° - 50° Adjustable (ELK21 Only) |

### ACCESSORIES



#### Lens

|        |          |
|--------|----------|
| EP731C | 18° Lens |
| EP732C | 25° Lens |
| EP733C | 38° Lens |
| EP734C | 60° Lens |

\*EP732C, EP733C, EP734C Included



#### Snoot

|      |       |
|------|-------|
| L50W | White |
| L50B | Black |



#### Secondary Optics

|     |               |
|-----|---------------|
| L45 | Hex Louver    |
| L46 | Linear Lens   |
| L47 | Spread Louver |
| L49 | Frosted Lens  |
| L51 | Color Shifter |

## 3" Koto™ Architectural Recessed Housings



3" High Lumen Maximum Adjustability ICA Housing  
1500 lm (18.9W) w/ELK21 Series Module  
Not for use with ELK19 Series Module  
**New Construction**



3" Shallow Maximum Adjustability ICA Housing  
850 lm (14.7W) w/ELK19 Series Module  
1100 lm (14.7W) w/ELK21 Series Module  
**New Construction**

| CAT NO.      | SPECIFICATIONS                                       |
|--------------|------------------------------------------------------|
| E3LK53ICA    | 15.7W, 120V, Triac/ELV                               |
| E3LK54ICAD   | 15.7W, 120/277V, 0-10V/Triac/ELV                     |
| E3LK54ICAD-L | 15.7W, 120/277V, 0-10V/Triac/ELV (Lutron 1% dimming) |
| E3LK54ICADAL | 15.7W, 120/277V, DALI 2                              |
| E3LK84ICA    | 18.9W, 120V, Triac/ELV                               |
| E3LK85ICAD   | 18.9W, 120/277V, 0-10V/Triac/ELV                     |
| E3LK85ICAD-L | 18.9W, 120/277V, 0-10V/Triac/ELV (Lutron 1% dimming) |
| E3LK85ICADAL | 18.9W, 120/277V, DALI 2                              |


| CAT NO.      | SPECIFICATIONS            |
|--------------|---------------------------|
| E3LK76ICA    | 120V, Triac/ELV           |
| E3LK77ICAD   | 120/277V, 0-10V/Triac/ELV |
| E3LK77ICADAL | 120/277V, DALI 2          |

# Compatible Products

For use with 3" Koto™ Twist-On Trims



## Koto™ 24V DC LED Light Engine



24V DC Koto™ LED  
Light Engine

### PRODUCT NUMBER BUILDER

| Koto™ LED<br>Light Engine | Lumens    | Color<br>Temperature | Voltage    |
|---------------------------|-----------|----------------------|------------|
| ELK                       |           |                      |            |
|                           | 08 800 lm | 27 2700K<br>30 3000K | -24 24V DC |

*\*Standard module includes 38° installed with 25° & 60° field changeable lenses.*

### ACCESSORIES



#### Lens

|        |          |
|--------|----------|
| EP731C | 18° Lens |
| EP732C | 25° Lens |
| EP733C | 38° Lens |
| EP734C | 60° Lens |

*\*EP732C, EP733C, EP734C  
Included with standard module*



#### Snoot

|      |       |
|------|-------|
| L50W | White |
| L50B | Black |



#### Secondary Optics

|     |               |     |                     |
|-----|---------------|-----|---------------------|
| L45 | Hex<br>Louder | L57 | White Hex<br>Louder |
| L46 | Linear Lens   | L52 | Blue Lens           |
| L47 | Spread Louder | L53 | Pink Shifter        |
| L49 | Frosted Lens  |     |                     |
| L51 | Color Shifter |     |                     |


## 3" Koto™ Dedicated LED ICA Housings (24V DC Input)



24V DC 2-Hour Fire Rated 3" ICA Housing  
**New Construction**

| CAT NO.    | SPECIFICATIONS              |
|------------|-----------------------------|
| E24V39FICA | 7 1/2" Height - Sound Rated |

*\*Requires 24V DC Transformer*



24V DC 3" ICA Maximum Adjustability Housing  
**New Construction**

| CAT NO.    | SPECIFICATIONS        |
|------------|-----------------------|
| E24V386ICA | Maximum Adjustability |

*\*Requires 24V DC Transformer*



24V DC 3" ICA Housing  
**New Construction**

| CAT NO.    | SPECIFICATIONS |
|------------|----------------|
| E24V390ICA |                |

*\*Requires 24V DC Transformer*



24V DC 3" ICA Housing  
**Remodel**

| CAT NO.     | SPECIFICATIONS |
|-------------|----------------|
| E24V390RICA |                |

*\*Requires 24V DC Transformer*