


Pex™ Precision die-cast trims with twist-on system for easy tool-free installation



**Lamp:** Koto™ LED Module and Canless Koto™ LED Module

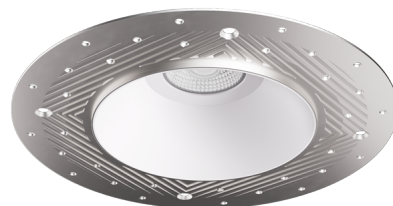

| Item   | Description                     |
|--------|---------------------------------|
| EL4SFR | 4" Round Trimless Spackle Frame |

# Compatible Products




For use with 4" Koto™ Twist-On Trims

## Koto™ LED Module & 4" Dedicated LED ICA Housing



**Koto™ LED Module**  
ELK07, ELK09, & ELK11



**Koto™ LED Module with 5-CCT Switch**



### Product Number

|                 |                      |
|-----------------|----------------------|
| <b>ELK08CT5</b> | 825 lm, 5-CCT, 120V  |
| <b>ELK10CT5</b> | 1000 lm, 5-CCT, 120V |

### PRODUCT NUMBER BUILDER

| Koto™ LED Module | Lumens  | Color Temperature                            | Beam Angle                                   |
|------------------|---------|----------------------------------------------|----------------------------------------------|
| <b>ELK</b>       |         |                                              |                                              |
| <b>07</b>        | 750 lm  | <b>27</b> 2700K                              | (blank) 38° lens (Standard)                  |
| <b>09</b>        | 950 lm  | <b>30</b> 3000K                              | <b>-S</b> 18° lens                           |
| <b>11</b>        | 1150 lm | <b>35</b> 3500K                              | <b>-N</b> 25° lens                           |
|                  |         | <b>40</b> 4000K                              | <b>-W</b> 60° lens                           |
|                  |         | <b>SD</b> Sunset Dimming (For ELK09 & ELK11) | <b>-FC</b> 18° - 50° Adjustable (ELK07 Only) |

### ACCESSORIES



#### Lens

|                |          |
|----------------|----------|
| <b>EP731C*</b> | 18° Lens |
| <b>EP732C*</b> | 25° Lens |
| <b>EP733C*</b> | 38° Lens |
| <b>EP734C*</b> | 60° Lens |

\*EP732C, EP733C, EP734C  
Included with standard module



#### Snoot

|             |       |
|-------------|-------|
| <b>L50W</b> | White |
| <b>L50B</b> | Black |



#### Secondary Optics

|            |               |
|------------|---------------|
| <b>L45</b> | Hex Louver    |
| <b>L46</b> | Linear Lens   |
| <b>L47</b> | Spread Louver |
| <b>L49</b> | Frosted Lens  |
| <b>L51</b> | Color Shifter |

\*Standard module includes 38° installed with 25° & 60° field changeable lenses.

## 4" Koto™ Dedicated LED ICA Housings



4" ICA Maximum Adjustability Housing

### New Construction


| CAT NO.  | SPECIFICATIONS        |
|----------|-----------------------|
| EL485ICA | Maximum Adjustability |

# Compatible Products

For use with 4" Koto™ Twist-On Trims



## Koto™ Architectural LED Light Engine



**Koto™ LED Light Engine**  
ELK19 - ELK21

| PRODUCT NUMBER BUILDER |                |                                |            |                                   |
|------------------------|----------------|--------------------------------|------------|-----------------------------------|
| Koto™ LED Light Engine | Lumens         | Color Temperature              | Beam Angle |                                   |
| ELK                    |                |                                |            |                                   |
| 19                     | 750 - 850 lm   | 27D 2700K                      | (blank)    | 38° lens (Standard)               |
| 21                     | 1100 - 1500 lm | 30D 3000K                      | -S         | 18° lens                          |
|                        |                | 35D 3500K                      | -N         | 25° lens                          |
|                        |                | 40D 4000K                      | -W         | 60° lens                          |
|                        |                | SD Sunset Dimming (ELK19 Only) | -FC        | 18° - 50° Adjustable (ELK21 Only) |

*\*Standard module includes 38° installed with 25° & 60° field changeable lenses.*

### ACCESSORIES



#### Lens

**EP731C** 18° Lens  
**EP732C** 25° Lens  
**EP733C** 38° Lens  
**EP734C** 60° Lens  
*\*EP732C, EP733C, EP734C included with standard module*



#### Snoot

**L50W** White  
**L50B** Black



#### Secondary Optics


**L45** Hex Louver  
**L46** Linear Lens  
**L47** Spread Louver  
**L49** Frosted Lens  
**L51** Color Shifter

## 4" Koto™ Architectural Recessed Housings



**4" Maximum Adjustability ICA Housing**  
 Use with ELK21 Series Module  
 Not for use with ELK19 Series Module  
**New Construction**

| CAT NO.    | SPECIFICATIONS                            |
|------------|-------------------------------------------|
| E4LK47ICA  | 1350 lm, 15.7W, 120V, Triac/ELV           |
| E4LK48ICAD | 1350 lm, 15.7W, 120/277V, 0-10V/Triac/ELV |
| E4LK78ICA  | 1500 lm, 18.9W, 120V, Triac/ELV           |
| E4LK79ICAD | 1500 lm, 18.9W, 120/277V, 0-10V/Triac/ELV |



**4" Shallow Maximum Adjustability ICA Housing**  
 1000 lm (14.7W) w/ELK19 Series Module  
 1200 lm (14.7W) w/ELK21 Series Module  
**New Construction**

| CAT NO.    | SPECIFICATIONS            |
|------------|---------------------------|
| E4LK98ICA  | 120V, Triac/ELV           |
| E4LK99ICAD | 120/277V, 0-10V/Triac/ELV |

# Compatible Products

For use with 4" Koto™ Twist-On Trims



## Koto™ 24V DC LED Light Engine



24V DC Koto™ LED  
Light Engine

| PRODUCT NUMBER BUILDER    |           |                      |  |            |
|---------------------------|-----------|----------------------|--|------------|
| Koto™ LED<br>Light Engine | Lumens    | Color<br>Temperature |  | Voltage    |
| ELK                       |           |                      |  |            |
|                           | 08 800 lm | 27 2700K             |  | -24 24V DC |
|                           |           | 30 3000K             |  |            |

*\*Standard module includes 38° installed with 25° & 60° field changeable lenses.*

### ACCESSORIES



#### Lens

EP731C 18° Lens  
EP732C 25° Lens  
EP733C 38° Lens  
EP734C 60° Lens

*\*EP732C, EP733C, EP734C  
Included with standard module*



#### Snoot


L50W White  
L50B Black



#### Secondary Optics

L45 Hex Louver  
L46 Linear Lens  
L47 Spread Louver  
L49 Frosted Lens  
L51 Color Shifter  
L57 White Hex Louver  
L52 Blue Lens  
L53 Pink Shifter

## 4" Koto™ Dedicated LED ICA Housings (24V DC Input)



24V DC 4" ICA Maximum Adjustability Housing  
New Construction

| CAT NO.    | SPECIFICATIONS        |
|------------|-----------------------|
| E24V485ICA | Maximum Adjustability |

*\*Requires 24V DC Transformer*