

# Pex™ 4" Round Rotatable Slot Aperture Trim

Pex™ Precision die-cast adjustable trims with twist-&-lock system for easy Koto™ Module installation



## Features

- 4" Round Adjustable Phenolic Baffle.
- 45° Adjustability. 358° Rotation.
- 5" O.D.
- Convenient twist-lock design for easy installation.
- Damp Location Rated.
- Lamp: Koto™ LED Module.
- Recommended to be used with Maximum Adjustability Housings.


## Technical Details

**Construction:** Diecast aluminum with a powder coated finish.

**Installation:** Twist-lock design allows for easy mounting onto the Koto™ LED Module.

**Lamp:** Koto™ LED Module.

## Dimensions

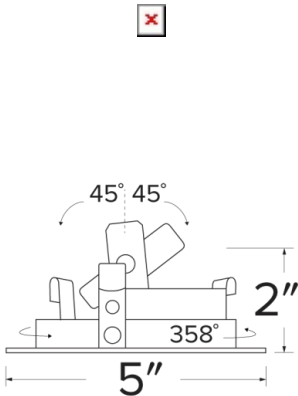

## Product Numbers

| Item     | Finish                |
|----------|-----------------------|
| ELK4120W | Black with White Trim |

## Product Number Builder Example: ELK4120W

Pex™ 4" Round Rotatable Slot Aperture

Finish

ELK4120

W Black with White Trim

# Compatible Products



For use with 4" Koto™ Twist-On Trims

## Koto™ LED Module & 4" Dedicated LED ICA Housing



**Koto™ LED Module**  
ELK07, ELK09, & ELK11



### Product Number

**ELK08CT5** 825 lm, 5-CCT, 120V  
**ELK10CT5** 1000 lm, 5-CCT, 120V

### PRODUCT NUMBER BUILDER

| Koto™ LED Module | Lumens  | Color Temperature                     | Beam Angle                            |
|------------------|---------|---------------------------------------|---------------------------------------|
| ELK              |         |                                       |                                       |
| 07               | 750 lm  | 27 2700K                              | (blank) 38° lens (Standard)           |
| 09               | 950 lm  | 30 3000K                              | -S 18° lens                           |
| 11               | 1150 lm | 35 3500K                              | -N 25° lens                           |
|                  |         | 40 4000K                              | -W 60° lens                           |
|                  |         | SD Sunset Dimming (For ELK09 & ELK11) | -FC 18° - 50° Adjustable (ELK07 Only) |

### ACCESSORIES



#### Lens

**EP731C\*** 18° Lens  
**EP732C\*** 25° Lens  
**EP733C\*** 38° Lens  
**EP734C\*** 60° Lens  
\*EP732C, EP733C, EP734C  
Included with standard module



#### Snoot

**L50W** White  
**L50B** Black



#### Secondary Optics

**L45** Hex Louver  
**L46** Linear Lens  
**L47** Spread Louver  
**L49** Frosted Lens  
**L51** Color Shifter

\*Standard module includes 38° installed  
with 25° & 60° field changeable lenses.

## 4" Koto™ Dedicated LED ICA Housings



4" ICA Maximum Adjustability Housing

**New Construction**


| CAT NO.  | SPECIFICATIONS        |
|----------|-----------------------|
| EL485ICA | Maximum Adjustability |

# Compatible Products

For use with 4" Koto™ Twist-On Trims



## Koto™ Architectural LED Light Engine



Koto™ LED Light Engine  
ELK19 - ELK21

| PRODUCT NUMBER BUILDER |                |                                |            |                                   |
|------------------------|----------------|--------------------------------|------------|-----------------------------------|
| Koto™ LED Light Engine | Lumens         | Color Temperature              | Beam Angle |                                   |
| ELK                    |                |                                |            |                                   |
| 19                     | 750 - 850 lm   | 27D 2700K                      | (blank)    | 38° lens (Standard)               |
| 21                     | 1100 - 1500 lm | 30D 3000K                      | -S         | 18° lens                          |
|                        |                | 35D 3500K                      | -N         | 25° lens                          |
|                        |                | 40D 4000K                      | -W         | 60° lens                          |
|                        |                | SD Sunset Dimming (ELK19 Only) | -FC        | 18° - 50° Adjustable (ELK21 Only) |

*\*Standard module includes 38° installed with 25° & 60° field changeable lenses.*

### ACCESSORIES



#### Lens

EP731C 18° Lens  
EP732C 25° Lens  
EP733C 38° Lens  
EP734C 60° Lens  
*\*EP732C, EP733C, EP734C  
Included with standard module*



#### Snoot

L50W White  
L50B Black



#### Secondary Optics

L45 Hex Louver  
L46 Linear Lens  
L47 Spread Louver  
L49 Frosted Lens  
L51 Color Shifter

## 4" Koto™ Architectural Recessed Housings



4" Maximum Adjustability ICA Housing  
Use with ELK21 Series Module  
Not for use with ELK19 Series Module  
**New Construction**

| CAT NO.    | SPECIFICATIONS                            |
|------------|-------------------------------------------|
| E4LK47ICA  | 1350 lm, 15.7W, 120V, Triac/ELV           |
| E4LK48ICAD | 1350 lm, 15.7W, 120/277V, 0-10V/Triac/ELV |
| E4LK78ICA  | 1500 lm, 18.9W, 120V, Triac/ELV           |
| E4LK79ICAD | 1500 lm, 18.9W, 120/277V, 0-10V/Triac/ELV |



4" Shallow Maximum Adjustability ICA Housing  
1000 lm (14.7W) w/ELK19 Series Module  
1200 lm (14.7W) w/ELK21 Series Module  
**New Construction**

| CAT NO.    | SPECIFICATIONS            |
|------------|---------------------------|
| E4LK98ICA  | 120V, Triac/ELV           |
| E4LK99ICAD | 120/277V, 0-10V/Triac/ELV |

# Compatible Products

For use with 4" Koto™ Twist-On Trims



## Koto™ 24V DC LED Light Engine



24V DC Koto™ LED  
Light Engine

| PRODUCT NUMBER BUILDER    |           |                      |  |            |
|---------------------------|-----------|----------------------|--|------------|
| Koto™ LED<br>Light Engine | Lumens    | Color<br>Temperature |  | Voltage    |
| ELK                       |           |                      |  |            |
|                           | 08 800 lm | 27 2700K             |  | -24 24V DC |
|                           |           | 30 3000K             |  |            |

*\*Standard module includes 38° installed with 25° & 60° field changeable lenses.*

### ACCESSORIES



#### Lens

EP731C 18° Lens  
EP732C 25° Lens  
EP733C 38° Lens  
EP734C 60° Lens

*\*EP732C, EP733C, EP734C  
Included with standard module*



#### Snoot


L50W White  
L50B Black



#### Secondary Optics

L45 Hex Louver  
L46 Linear Lens  
L47 Spread Louver  
L49 Frosted Lens  
L51 Color Shifter  
L57 White Hex Louver  
L52 Blue Lens  
L53 Pink Shifter

## 4" Koto™ Dedicated LED ICA Housings (24V DC Input)



24V DC 4" ICA Maximum Adjustability Housing  
New Construction

| CAT NO.    | SPECIFICATIONS        |
|------------|-----------------------|
| E24V485ICA | Maximum Adjustability |

*\*Requires 24V DC Transformer*