


# Pex™ 4" Round Trimless Adjustable Smooth Reflector Trim

Pex™ Precision die-cast trims with twist-on system for easy tool-free installation

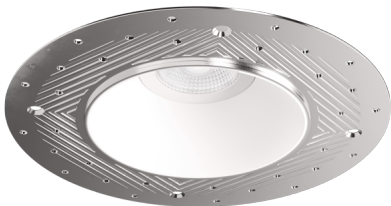


## Features

- 4" Trimless Smooth Reflector.
- ELK430 includes spackle frame
- ELK415 requires spackle frame EL4SFR
- 35° Adjustability.
- Convenient twist-on design for easy installation.
- Damp Location Rated.
- Lamp: Koto™ LED Module and Canless Koto™ LED Module.

## Technical Details

**Installation:** Twist-lock design allows for easy mounting onto the Koto™ LED Module.


**Lamp:** Koto™ LED Module.

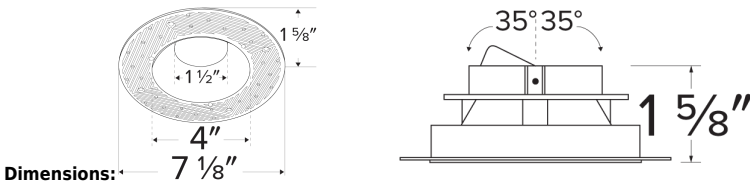


## Options



White



Black



Bronze



ELK415 - Wht Reflector



ELK415 - Black Reflector



ELK415 - Bronze



ELK415 - Haze Reflector

## Dimension



## Product Numbers

| Item    | Description                  | Finish    |
|---------|------------------------------|-----------|
| ELK430W | Spackle frame with Reflector | All White |

| Item            | Description                  | Finish     |
|-----------------|------------------------------|------------|
| <b>ELK430B</b>  | Spackle frame with Reflector | All Black  |
| <b>ELK430BZ</b> | Spackle frame with Reflector | All Bronze |
| <b>EL4SFR</b>   | Spackle Frame Only           |            |
| <b>ELK415W</b>  | Reflector only               | All White  |
| <b>ELK415B</b>  | Reflector Only               | All Black  |
| <b>ELK415BZ</b> | Reflector Only               | All Bronze |
| <b>ELK415H</b>  | Reflector Only               | All Haze   |

Product Number Builder

Example: **ELK430W**

Pex™ 4" Canless Trimless Smooth Reflector

Finish

ELK430


- W** All White
- B** All Black
- BZ** All Bronze
- H** All Haze

# Compatible Products



For use with 4" Koto™ Twist-&-Lock Trimless

## Koto™ LED Module & 4" Dedicated LED ICA Housing



**Koto™ LED Module**  
ELK07 - ELK09


| PRODUCT NUMBER BUILDER |        |                   |                             |                             |
|------------------------|--------|-------------------|-----------------------------|-----------------------------|
| Koto™ LED Module       | Lumens | Color Temperature | Beam Angle                  |                             |
| ELK                    |        |                   |                             |                             |
| 07                     | 750 lm | 27                | 2700K                       | (blank) 38° lens (Standard) |
| 09                     | 950 lm | 30                | 3000K                       | -S 18° lens                 |
|                        |        | 35                | 3500K                       | -N 25° lens                 |
|                        |        | 40                | 4000K                       | -W 60° lens                 |
|                        |        | SD                | Sunset Dimming (ELK09 Only) |                             |



**4" ICA Maximum Adjustability Housing**  
**New Construction**

| CAT NO.  | SPECIFICATIONS        |
|----------|-----------------------|
| EL485ICA | Maximum Adjustability |

## Koto™ Architectural LED Light Engine & 4" Architectural ICA Housings




**Koto™ LED Light Engine**  
ELK19 - ELK21

| PRODUCT NUMBER BUILDER |                |                   |                             |                             |
|------------------------|----------------|-------------------|-----------------------------|-----------------------------|
| Koto™ LED Light Engine | Lumens         | Color Temperature | Beam Angle                  |                             |
| ELK                    |                |                   |                             |                             |
| 19                     | 750 - 850 lm   | 27D               | 2700K                       | (blank) 38° lens (Standard) |
| 21                     | 1100 - 1500 lm | 30D               | 3000K                       | -S 18° lens                 |
|                        |                | 35D               | 3500K                       | -N 25° lens                 |
|                        |                | 40D               | 4000K                       | -W 60° lens                 |
|                        |                | SD                | Sunset Dimming (ELK19 Only) |                             |



**4" High Lumen Maximum Adjustability ICA Housing**  
1500 lm (18.9W) w/ELK21 Series Module  
Not for use with ELK19 Series Module  
**New Construction**

| CAT NO.    | SPECIFICATIONS                      |
|------------|-------------------------------------|
| E4LK47ICA  | 15.7W - 120V - Triac/ELV            |
| E4LK48ICAD | 15.7W - 120/277V<br>0-10V/Triac/ELV |
| E4LK79ICAD | 18.9W - 120/277V<br>0-10V/Triac/ELV |



**4" Shallow Maximum Adjustability ICA Housing**  
850 lm (14.7W) w/ELK19 Series Module  
1100 lm (14.7W) w/ELK21 Series Module  
**New Construction**

| CAT NO.    | SPECIFICATIONS             |
|------------|----------------------------|
| E4LK98ICA  | 120V - Triac/ELV           |
| E4LK99ICAD | 120/277V - 0-10V/Triac/ELV |

### ACCESSORIES FOR KOTO™ LED MODULE & KOTO™ ARCHITECTURAL LED LIGHT ENGINE



#### Lens

|        |          |
|--------|----------|
| EP731C | 18° Lens |
| EP732C | 25° Lens |
| EP733C | 38° Lens |
| EP734C | 60° Lens |

\*EP732C, EP733C, EP734C Included



#### Reflectors

|        |     |
|--------|-----|
| EP735C | 15° |
| EP736C | 25° |
| EP737C | 38° |
| EP738C | 60° |



#### Secondary Optics


|     |               |
|-----|---------------|
| L45 | Hex Louver    |
| L46 | Linear Louver |
| L47 | Spread Louver |

# Compatible Products

For use with 4" Koto™ Twist-On Trims



## Koto™ Architectural LED Light Engine



Koto™ LED Light Engine  
ELK19 - ELK21

| PRODUCT NUMBER BUILDER |                |                                |            |                                   |
|------------------------|----------------|--------------------------------|------------|-----------------------------------|
| Koto™ LED Light Engine | Lumens         | Color Temperature              | Beam Angle |                                   |
| ELK                    |                |                                |            |                                   |
| 19                     | 750 - 850 lm   | 27D 2700K                      | (blank)    | 38° lens (Standard)               |
| 21                     | 1100 - 1500 lm | 30D 3000K                      | -S         | 18° lens                          |
|                        |                | 35D 3500K                      | -N         | 25° lens                          |
|                        |                | 40D 4000K                      | -W         | 60° lens                          |
|                        |                | SD Sunset Dimming (ELK19 Only) | -FC        | 18° - 50° Adjustable (ELK21 Only) |

*\*Standard module includes 38° installed with 25° & 60° field changeable lenses.*

### ACCESSORIES



#### Lens

EP731C 18° Lens  
EP732C 25° Lens  
EP733C 38° Lens  
EP734C 60° Lens  
*\*EP732C, EP733C, EP734C  
Included with standard module*



#### Snoot

L50W White  
L50B Black



#### Secondary Optics


L45 Hex Louver  
L46 Linear Lens  
L47 Spread Louver  
L49 Frosted Lens  
L51 Color Shifter

## 4" Koto™ Architectural Recessed Housings



4" Maximum Adjustability ICA Housing  
Use with ELK21 Series Module  
Not for use with ELK19 Series Module  
**New Construction**

| CAT NO.    | SPECIFICATIONS                            |
|------------|-------------------------------------------|
| E4LK47ICA  | 1350 lm, 15.7W, 120V, Triac/ELV           |
| E4LK48ICAD | 1350 lm, 15.7W, 120/277V, 0-10V/Triac/ELV |
| E4LK78ICA  | 1500 lm, 18.9W, 120V, Triac/ELV           |
| E4LK79ICAD | 1500 lm, 18.9W, 120/277V, 0-10V/Triac/ELV |



4" Shallow Maximum Adjustability ICA Housing  
1000 lm (14.7W) w/ELK19 Series Module  
1200 lm (14.7W) w/ELK21 Series Module  
**New Construction**


| CAT NO.    | SPECIFICATIONS            |
|------------|---------------------------|
| E4LK98ICA  | 120V, Triac/ELV           |
| E4LK99ICAD | 120/277V, 0-10V/Triac/ELV |

# Compatible Products

For use with 4" Koto™ Twist-On Trims



## Koto™ 24V DC LED Light Engine



24V DC Koto™ LED  
Light Engine

| PRODUCT NUMBER BUILDER |           |                   |  |            |
|------------------------|-----------|-------------------|--|------------|
| Koto™ LED Light Engine | Lumens    | Color Temperature |  | Voltage    |
| ELK                    |           |                   |  |            |
|                        | 08 800 lm | 27 2700K          |  | -24 24V DC |
|                        |           | 30 3000K          |  |            |

*\*Standard module includes 38° installed with 25° & 60° field changeable lenses.*

### ACCESSORIES



#### Lens

EP731C 18° Lens  
EP732C 25° Lens  
EP733C 38° Lens  
EP734C 60° Lens

*\*EP732C, EP733C, EP734C  
Included with standard module*



#### Snoot


L50W White  
L50B Black



#### Secondary Optics

L45 Hex Louver  
L46 Linear Lens  
L47 Spread Louver  
L49 Frosted Lens  
L51 Color Shifter  
L57 White Hex Louver  
L52 Blue Lens  
L53 Pink Shifter

## 4" Koto™ Dedicated LED ICA Housings (24V DC Input)



24V DC 4" ICA Maximum Adjustability Housing  
New Construction

| CAT NO.    | SPECIFICATIONS        |
|------------|-----------------------|
| E24V485ICA | Maximum Adjustability |

*\*Requires 24V DC Transformer*