ELCO Lighting

Project name:

Fixture type:

Date:

Pex™ 4" Round Trimless Adjustable Smooth Reflector Trim

Pex™ Precision die-cast trims with twist-on system for easy tool-free installation

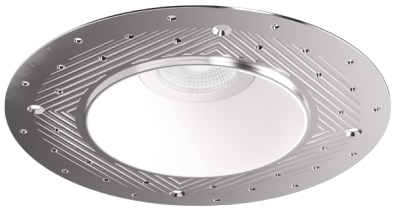

Features

- 4″ Trimless Smooth Reflector.
- ELK430 includes spackle frame
- ELK415 requires spackle frame EL4SFR
- 35° Adjustability.
- Convenient twist-on design for easy installation.
- Damp Location Rated.
- Lamp: Koto™ LED Module and Canless Koto™ LED Module.

Technical Details

Installation: Twist-lock design allows for easy mounting onto the Koto™ LED Module.

Lamp: Koto™ LED Module.

Dimensions:



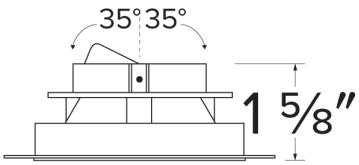

Options

White

Black



Bronze

ELK415 - Wht Reflector

ELK415 - Black Reflector

ELK415 - Bronze

ELK415 - Haze Reflector

Dimension



2042 E. Vernon Ave., Vernon, CA 90058 • Tel (323) 231-2600 Fax (323) 231-3200 • elcolighting.com
© ELCO Lighting 2026. All rights reserved • Rev. 22 Oct 2025 • ELCO Lighting reserves the right to make specification and design changes without notice.

Product Numbers

Item	Description	Finish
ELK430W	Spackle frame with Reflector	All White
ELK430B	Spackle frame with Reflector	All Black
ELK430BZ	Spackle frame with Reflector	All Bronze
EL4SFR	Spackle Frame Only	
ELK415W	Reflector only	All White
ELK415B	Reflector Only	All Black
ELK415BZ	Reflector Only	All Bronze
ELK415H	Reflector Only	All Haze

Product Number Builder Example: **ELK430W**

Pex™ 4″ Canless Trimless Smooth Reflector

ELK430

Finish

W All White
B All Black
BZ All Bronze
H All Haze

© ELCO Lighting 2026. All rights reserved • Rev. 22 Oct 2025 • ELCO Lighting reserves the right to make specification and design changes without notice.

Compatible Products

For use with **4" Koto™ Twist-&-Lock Trimless**

Koto™ LED Module & 4" Dedicated LED ICA Housing



Koto™ LED Module
ELK07 - ELK09

PRODUCT NUMBER BUILDER

Koto™ LED Module	Lumens	Color Temperature	Beam Angle
ELK			
	07 750 lm	**27** 2700K	**(blank)** 38° lens (Standard)
	09 950 lm	**30** 3000K	**-S** 18° lens
		35 3500K	**-N** 25° lens
		40 4000K	**-W** 60° lens
		SD Sunset Dimming (ELK09 Only)	



4" ICA Maximum Adjustability Housing
New Construction

CAT NO.	SPECIFICATIONS
EL485ICA	Maximum Adjustability

Koto™ Architectural LED Light Engine & 4" Architectural ICA Housings



Koto™ LED Light Engine
ELK19 - ELK21

PRODUCT NUMBER BUILDER

Koto™ LED Light Engine	Lumens	Color Temperature	Beam Angle
ELK			
	19 750 - 850 lm	**27D** 2700K	**(blank)** 38° lens (Standard)
	21 1100 - 1500 lm	**30D** 3000K	**-S** 18° lens
		35D 3500K	**-N** 25° lens
		40D 4000K	**-W** 60° lens
		SD Sunset Dimming (ELK19 Only)	



4" High Lumen Maximum Adjustability ICA Housing
1500 lm (18.9W) w/ELK21 Series Module
Not for use with ELK19 Series Module
New Construction

CAT NO.	SPECIFICATIONS
E4LK47ICA	15.7W - 120V - Triac/ELV
E4LK48ICAD	15.7W - 120/277V 0-10V/Triac/ELV
E4LK79ICAD	18.9W - 120/277V 0-10V/Triac/ELV



4" Shallow Maximum Adjustability ICA Housing
850 lm (14.7W) w/ELK19 Series Module
1100 lm (14.7W) w/ELK21 Series Module
New Construction

CAT NO.	SPECIFICATIONS
E4LK98ICA	120V - Triac/ELV
E4LK99ICAD	120/277V - 0-10V/Triac/ELV

ACCESSORIES FOR KOTO™ LED MODULE & KOTO™ ARCHITECTURAL LED LIGHT ENGINE

Lens

EP731C	18° Lens
EP732C	25° Lens
EP733C	38° Lens
EP734C	60° Lens

**EP732C, EP733C, EP734C Included*

Reflectors

EP735C	15°
EP736C	25°
EP737C	38°
EP738C	60°

Secondary Optics

L45	Hex Louver
L46	Linear Louver
L47	Spread Louver

© ELCO Lighting 2026. All rights reserved • Rev. 22 Oct 2025 • ELCO Lighting reserves the right to make specification and design changes without notice.

Compatible Products

For use with **4" Koto™ Twist-On Trims**

Koto™ Architectural LED Light Engine



Koto™ LED Light Engine
ELK19 - ELK21

PRODUCT NUMBER BUILDER

Koto™ LED Light Engine	Lumens	Color Temperature	Beam Angle
ELK			
	19 750 - 850 lm	**27D** 2700K	**(blank)** 38° lens (Standard)
	21 1100 - 1500 lm	**30D** 3000K	**-S** 18° lens
		35D 3500K	**-N** 25° lens
		40D 4000K	**-W** 60° lens
		SD Sunset Dimming (ELK19 Only)	**-FC** 18° - 50° Adjustable (ELK21 Only)

**Standard module includes 38° installed with 25° & 60° field changeable lenses.*

ACCESSORIES

Lens

EP731C	18° Lens
EP732C	25° Lens
EP733C	38° Lens
EP734C	60° Lens

**EP732C, EP733C, EP734C Included with standard module*

Snoot

L50W	White
L50B	Black

Secondary Optics

L45	Hex Louver
L46	Linear Lens
L47	Spread Louver
L49	Frosted Lens
L51	Color Shifter

4" Koto™ Architectural Recessed Housings



4" Maximum Adjustability ICA Housing
Use with ELK21 Series Module
Not for use with ELK19 Series Module
New Construction

CAT NO.	SPECIFICATIONS
E4LK47ICA	1350 lm, 15.7W, 120V, Triac/ELV
E4LK48ICAD	1350 lm, 15.7W, 120/277V, 0-10V/Triac/ELV
E4LK78ICA	1500 lm, 18.9W, 120V, Triac/ELV
E4LK79ICAD	1500 lm, 18.9W, 120/277V, 0-10V/Triac/ELV



4" Shallow Maximum Adjustability ICA Housing
1000 lm (14.7W) w/ELK19 Series Module
1200 lm (14.7W) w/ELK21 Series Module
New Construction

CAT NO.	SPECIFICATIONS
E4LK98ICA	120V, Triac/ELV
E4LK99ICAD	120/277V, 0-10V/Triac/ELV

© ELCO Lighting 2026. All rights reserved • Rev. 22 Oct 2025 • ELCO Lighting reserves the right to make specification and design changes without notice.

Compatible Products

For use with **4" Koto™ Twist-On Trims**

Koto™ 24V DC LED Light Engine



24V DC Koto™ LED Light Engine

PRODUCT NUMBER BUILDER

Koto™ LED Light Engine	Lumens	Color Temperature	Voltage
ELK			
	08 800 lm	**27** 2700K	**-24** 24V DC
		30 3000K	

**Standard module includes 38° installed with 25° & 60° field changeable lenses.*

ACCESSORIES

Lens

EP731C	18° Lens
EP732C	25° Lens
EP733C	38° Lens
EP734C	60° Lens

**EP732C, EP733C, EP734C Included with standard module*

Snoot

L50W	White
L50B	Black

Secondary Optics

L45	Hex Louver	**L57**	White Hex Louver
L46	Linear Lens	**L52**	Blue Lens
L47	Spread Louver	**L53**	Pink Shifter
L49	Frosted Lens		
L51	Color Shifter		

4" Koto™ Dedicated LED ICA Housings (24V DC Input)



24V DC 4" ICA Maximum Adjustability Housing
New Construction

CAT NO.	SPECIFICATIONS
E24V485ICA	Maximum Adjustability

**Requires 24V DC Transformer*

© ELCO Lighting 2026. All rights reserved • Rev. 22 Oct 2025 • ELCO Lighting reserves the right to make specification and design changes without notice.