

SAGE LED Undercabinet Lightbar




Features

- 1"H x 1"W
- End to end connector and mounting brackets included
- Linkable up to 40ft.
- Polycarbonate lens
- 120V Dimmable
- ETL Listed
- ENERGY STAR qualified
- JA8-2022

Specifications

Wattage	10W
Lumens	600 lm
Voltage	120V
Color Temp.	2700K, 3000K, 3500K, 4000K, 5000K
CRI	90+

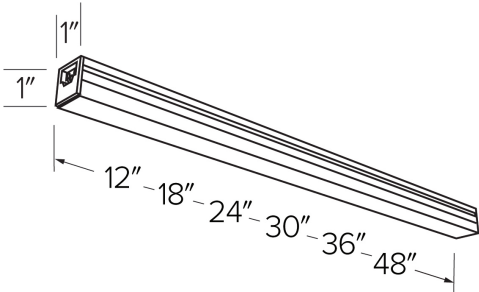

Product Number

Item	Description	Lumens	CCT	Watts	Voltage	Finish
EUD34CT5W	24"	600 lm	2700K, 3000K, 3500K, 4000K, 5000K	10W	120V	All White

Compatible Products

Sage® LED Undercabinet Light



Accessories



6' Power Cord

CAT NO.	SPECIFICATIONS
EUDCRD	6' Length



End-to-End Connector

CAT NO.	SPECIFICATIONS
EUDCS31	



6' Linking Cable

CAT NO.	SPECIFICATIONS
EUDC31	



Junction Box

CAT NO.	SPECIFICATIONS
EUDJBX	White



ELCO Lighting

Dimmer Compatibility Chart

Undercabinet

EUD Series

For Reference Only

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

Manufacturer	Product	Part Number	Dimmed Light Output Range
120V Only			
Legrand	CFL/LED Multi-way Paddle Dimmer	HDCL-453	10% - 100%
Leviton	IllumaTech Single Pole/3-Way Preset Electro-Mechanical Electronic Low Voltage Slide Dimmer	IPE04	10% - 100%
	Decora SureSlide® Single Pole/3-Way with Present ON/OFF Switch	6674	5% - 90%
Lutron	Rotary Dim N Glo 600W 3-Way Dimmer	DNG-603PH	10% - 100%
	DIVA® (Gloss) 450W, Single Pole, Magnetic Low Voltage Dimmer	DVLV-600P	10% - 100%
	DIVA® Series 600W Single Pole Dimmer	DV-600P	10% - 100%
	DIVA® Series 150W Single Pole/3-Way Dimmer	DVCL-153P	5% - 86%
	Maestro® Series 150W Single Pole/3-Way/Multi-Location Dimmer	MACL-153M	5% - 80%
	DIVA® (Gloss) 600W 3-Way Preset Eco-dim Dimmer	DV-603PG	10% – 100%

*NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.