



ELCO Slant
Sloped Ceiling Lighting

Sloped Ceiling Recessed Fixtures

LED Housings and LED Inserts
Medium Base Housings and Trims

EL **ELCO Lighting**
The Best Choice in Lighting

Over two and a half decades ago, in the heart of Los Angeles, ELCO Lighting was founded on the philosophy that high quality lighting products should be sold at a fair market price. Our commitment to this philosophy and dedication to exceptional customer service serve as the very soul of our company. We take pride in our perpetual commitment to such standards that enable us to continually prosper in a highly competitive and unpredictable industry. With our expanding LED product line that entails recessed, track, undercabinet, outdoor and emergency lighting, we are ready to fulfill a variety of lighting demands. Quality engineering, fair market value, professional customer service, and micro-managed inventory are the cornerstones of ELCO Lighting.

CONTENTS

LED Housings & Inserts

5" LED Sloped Ceiling IC Housing	8
5" Sloped Ceiling LED Inserts	9
6" LED Sloped Ceiling IC Housing	10
6" Sloped Ceiling LED Inserts	11
6" LED Super Sloped Ceiling IC Housing	12
6" Super Sloped Ceiling LED Inserts	13


Medium Base Housings & Trims

5" Sloped Ceiling Medium Base IC Housing	16
5" Sloped Ceiling Trims	17
6" Sloped Ceiling Medium Base IC Housing	18
6" Sloped Ceiling Medium Base Non-IC Housing	19
6" Sloped Ceiling Trims	20
6" Super Sloped Ceiling Medium Base IC Housing	22
6" Super Sloped Ceiling Medium Base Non-IC Housing	23
6" Super Sloped Ceiling Trims	24

The **Quality** Choice



The **Timely** Choice

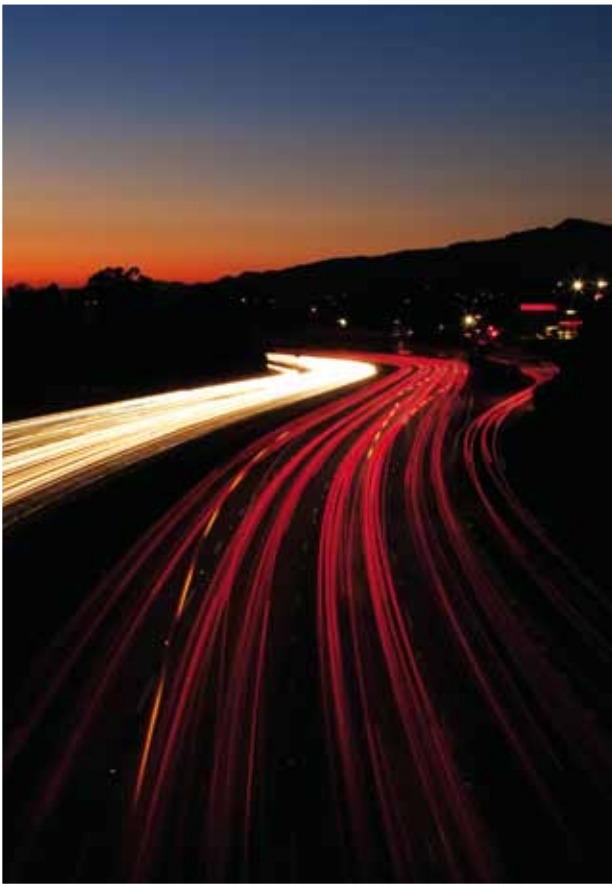

The **Contractor's** Choice



The **Leading** Choice



The **Trusted** Choice

EL **ELCO Lighting**
The Best Choice in Lighting




LED Housings & Inserts

5" Sloped Ceiling Housings & Inserts	8
6" Sloped Ceiling Housings & Inserts	10
6" Super Sloped Ceiling Housings & Inserts	12


LED Dedicated Sloped Ceiling Housing and Inserts

LED Dedicated Housings are UL rated as IC Airtight for use in insulated ceilings.

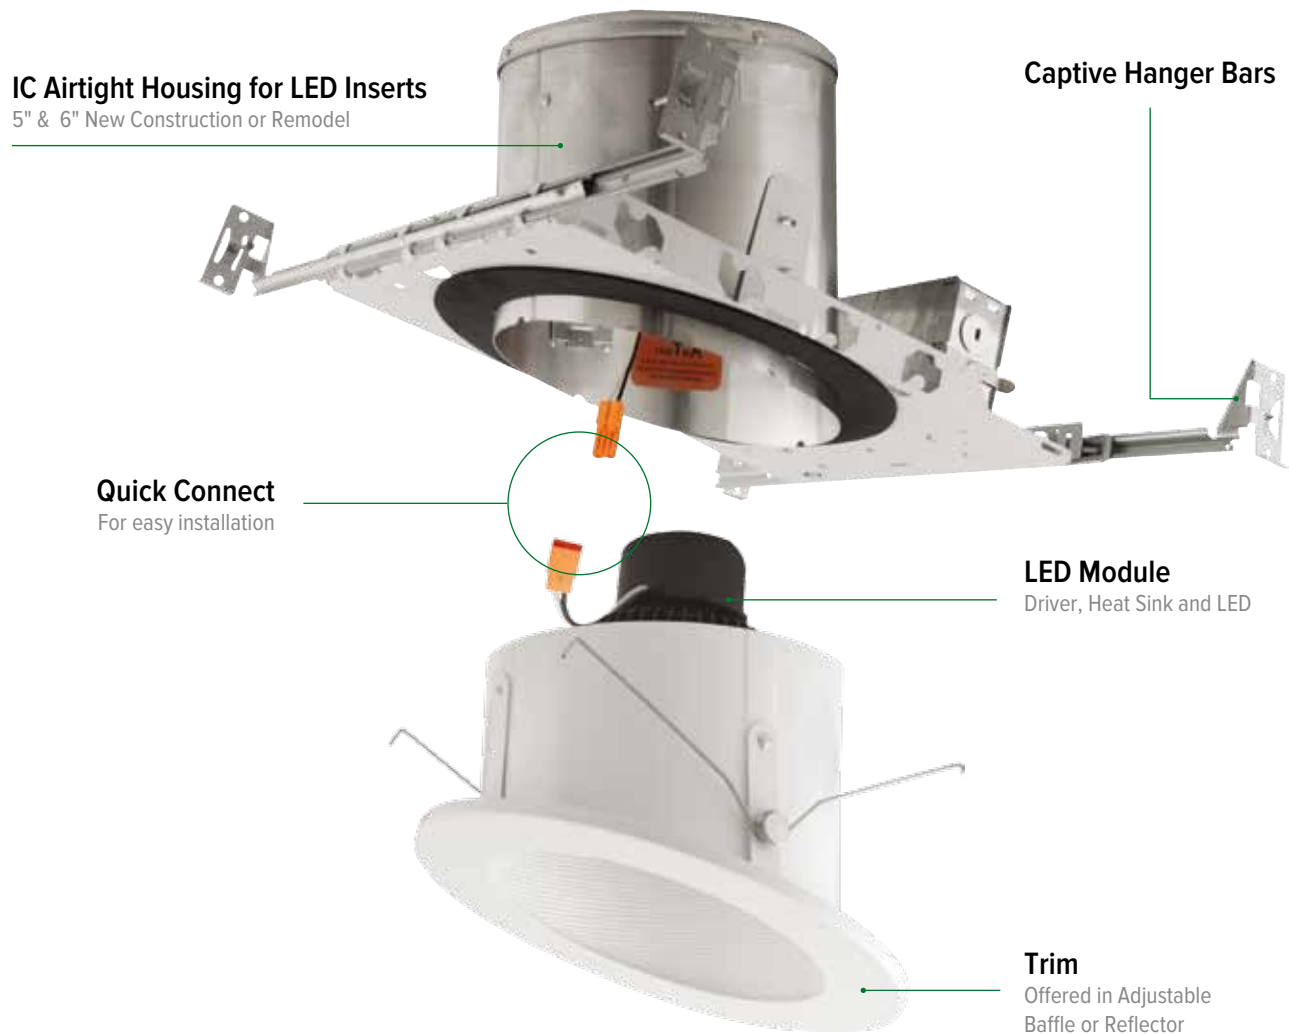


U.S. PATENT NO. 5548499

Recessed downlighting has quickly become the most elegant way to add lighting to a vaulted or sloped ceiling. ELCO Lighting's Slant product family is designed specifically for sloped ceilings. Slant's innovative-patented solution allows for installation in sloped ceilings ranging from 2/12 (10°) to 12/12 (45°).

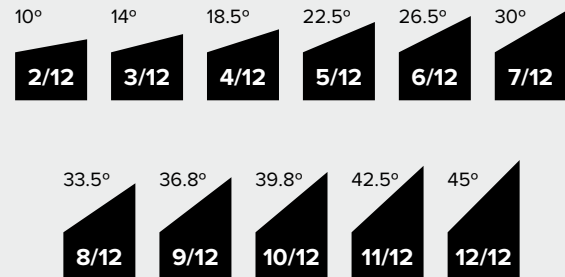

5" Dedicated LED Sloped Ceiling **IC Housing**

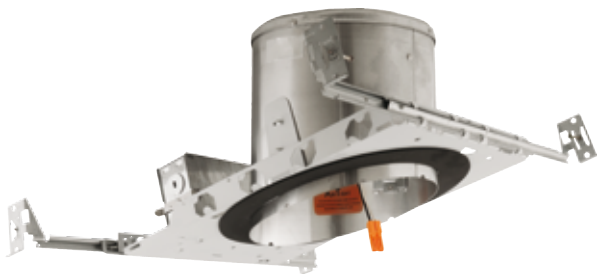

EL590ICA

5" IC Airtight Single Wall New Construction

Can be used in insulated ceilings. Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 2/12 to 6/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

CAPTIVE HANGER BARS Span up to 24" joists with Real Nail

7 1/2" HEIGHT Allows for use in 2" x 8" construction

ALUMINUM CONSTRUCTION Single Wall Housing

DAMP LOCATION UL Listed


FEED THROUGH UL Listed

DIRECT CONTACT WITH INSULATION UL Listed

AIRTIGHT Per ASTM E-283

CA T24 High Efficacy Luminaire

LAMPS ELCO Slope ceiling inserts on page 9

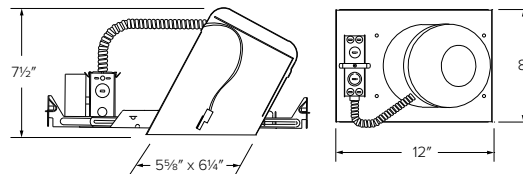

EL590RICA

5" IC Airtight Remodel

Can be used in insulated ceilings. Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 2/12 to 6/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

7 1/2" HEIGHT Allows for use in 2" x 8" construction

DAMP LOCATION UL Listed


FEED THROUGH UL Listed

DIRECT CONTACT WITH INSULATION UL Listed

AIRTIGHT Per ASTM E-283

CA T24 High Efficacy Luminaire

LAMPS ELCO Slope ceiling inserts on page 9

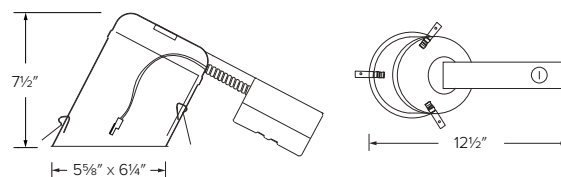

5" Sloped Ceiling LED Inserts

Sloped Ceiling LED Inserts feature an integral gimbal for $\pm 25^\circ$ adjustability. Compatible with most incandescent and low voltage dimmers.

5" Baffle Inserts



EL51127W

1050 lm
2700K
15W

EL51130W

1050 lm
3000K
15W



EL51127B

1050 lm
2700K
15W

EL51130B

1050 lm
3000K
15W



EL51127BZ

1050 lm
2700K
15W

EL51130BZ

1050 lm
3000K
15W

5" Reflector Inserts



EL51227W

1050 lm
2700K
15W

EL51230W

1050 lm
3000K
15W



EL51227C

1050 lm
2700K
15W

EL51230C

1050 lm
3000K
15W




EL51227B

1050 lm
2700K
15W

EL51230B

1050 lm
3000K
15W



INPUT VOLTAGE 120V

CRI 90+

LUMEN (WATTAGE) 1050 lm (15W)

COLOR TEMPERATURE 2700K or 3000K

ADJUSTABILITY $\pm 25^\circ$ tilt

DIMMABLE Triac and ELV

DAMP LOCATION UL Listed

LIFE SPAN 50,000 hours L70

COMPATIBILITY EL590ICA, EL590RICA

6" Dedicated LED Sloped Ceiling IC Housing



EL9701CA

6" IC Airtight Single Wall New Construction

Can be used in insulated ceilings. Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 2/12 to 6/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

CAPTIVE HANGER BARS Span up to 24" joists with Real Nail

7 1/2" HEIGHT Allows for use in 2" x 8" construction

ALUMINUM CONSTRUCTION Single Wall Housing

DAMP LOCATION UL Listed

FEED THROUGH UL Listed


DIRECT CONTACT WITH INSULATION UL Listed

AIRTIGHT Per ASTM E-283

CA T24 High Efficacy Luminaire

LAMPS ELCO Sloped ceiling inserts on page 11

U.S. PATENT NO. 5548499

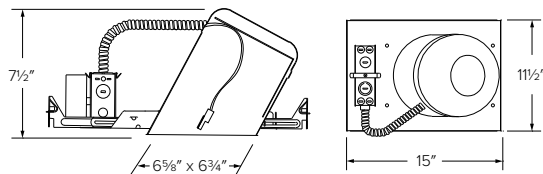

EL970RICA

6" IC Airtight Remodel

Can be used in insulated ceilings. Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 2/12 to 6/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

7 1/2" HEIGHT Allows for use in 2" x 8" construction

DAMP LOCATION UL Listed

FEED THROUGH UL Listed


DIRECT CONTACT WITH INSULATION UL Listed

AIRTIGHT Per ASTM E-283

CA T24 High Efficacy Luminaire

LAMPS ELCO Sloped ceiling inserts on page 11

U.S. PATENT NO. 5548499

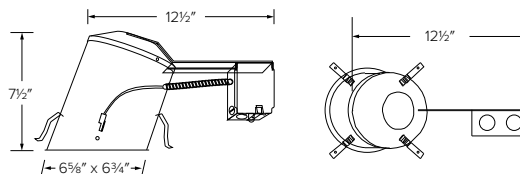

6" Sloped Ceiling LED Inserts

Sloped Ceiling LED Inserts feature an integral gimbal for $\pm 25^\circ$ adjustability.
Compatible with most incandescent and low voltage dimmers.

6" Baffle Inserts



EL71327W EL71330W

1050 lm	1050 lm
2700K	3000K
15W	15W

EL71427W EL71430W

1150 lm	1150 lm
2700K	3000K
18W	18W



EL71327B EL71330B

1050 lm	1050 lm
2700K	3000K
15W	15W

EL71427B EL71430B

1150 lm	1150 lm
2700K	3000K
18W	18W



EL71327BZ EL71330BZ

1050 lm	1050 lm
2700K	3000K
15W	15W

EL71427BZ EL71430BZ

1150 lm	1150 lm
2700K	3000K
18W	18W

6" Reflector Inserts



EL71527W EL71530W

1050 lm	1050 lm
2700K	3000K
15W	15W

EL71627W EL71630W

1150 lm	1150 lm
2700K	3000K
18W	18W



EL71527C EL71530C

1050 lm	1050 lm
2700K	3000K
15W	15W

EL71627C EL71630C

1150 lm	1150 lm
2700K	3000K
18W	18W




EL71527B EL71530B

1050 lm	1050 lm
2700K	3000K
15W	15W

EL71627B EL71630B

1150 lm	1150 lm
2700K	3000K
18W	18W



INPUT VOLTAGE 120V

CRI 90+

LUMEN (WATTAGE) 1050 lm (15W) or 1150 lm (18W)

COLOR TEMPERATURE 2700K or 3000K

ADJUSTABILITY $\pm 25^\circ$ tilt

DIMMABLE Triac and ELV

DAMP LOCATION UL Listed

LIFE SPAN 50,000 hours L70

COMPATIBILITY EL970ICA, EL970RICA

U.S. PATENT NO. 5548499

6" Dedicated LED Super Sloped Ceiling **IC Housing**



EL971ICA

6" IC Airtight Single Wall New Construction

Can be used in insulated ceilings. Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 7/12 to 12/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

CAPTIVE HANGER BARS Span up to 24" joists with Real Nail

7 1/2" HEIGHT Allows for use in 2" x 8" construction

ALUMINUM CONSTRUCTION Single Wall Housing

DAMP LOCATION UL Listed


FEED THROUGH UL Listed

DIRECT CONTACT WITH INSULATION UL Listed

AIRTIGHT Per ASTM E-283

CA T24 High Efficacy Luminaire

LAMPS ELCO Sloped ceiling inserts on page 13

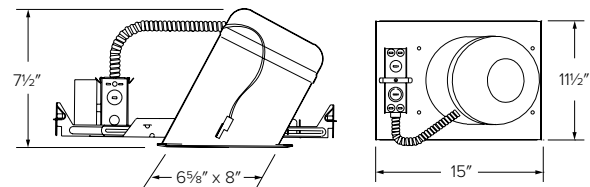

EL971RICA

6" IC Airtight Remodel

Can be used in insulated ceilings. Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 7/12 to 12/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

7 1/2" HEIGHT Allows for use in 2" x 8" construction

DAMP LOCATION UL Listed


FEED THROUGH UL Listed

DIRECT CONTACT WITH INSULATION UL Listed

AIRTIGHT Per ASTM E-283

CA T24 High Efficacy Luminaire

LAMPS ELCO Sloped ceiling inserts on page 13

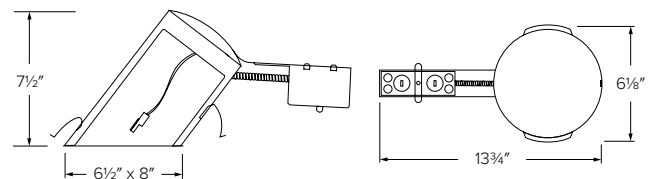

6" Super Sloped Ceiling LED Inserts

Sloped Ceiling LED Inserts feature an integral gimbal for $\pm 25^\circ$ adjustability.
Compatible with most incandescent and low voltage dimmers.

6" Baffle Inserts



EL76327W EL76330W

1050 lm	1050 lm
2700K	3000K
15W	15W

EL76427W EL76430W

1150 lm	1150 lm
2700K	3000K
18W	18W



EL76327B EL76330B

1050 lm	1050 lm
2700K	3000K
15W	15W

EL76427B EL76430B

1150 lm	1150 lm
2700K	3000K
18W	18W



EL76327BZ EL76330BZ

1050 lm	1050 lm
2700K	3000K
15W	15W

EL76427BZ EL76430BZ

1150 lm	1150 lm
2700K	3000K
18W	18W

6" Reflector Inserts



EL76127W EL76130W

1050 lm	1050 lm
2700K	3000K
15W	15W

EL76227W EL76230W

1150 lm	1150 lm
2700K	3000K
18W	18W



EL76127C EL76130C

1050 lm	1050 lm
2700K	3000K
15W	15W

EL76227C EL76230C

1150 lm	1150 lm
2700K	3000K
18W	18W




EL76127B EL76130B

1050 lm	1050 lm
2700K	3000K
15W	15W

EL76227B EL76230B

1150 lm	1150 lm
2700K	3000K
18W	18W



INPUT VOLTAGE 120V

CRI 90+

LUMEN (WATTAGE) 1050 lm (15W) or 1150 lm (18W)

COLOR TEMPERATURE 2700K or 3000K

ADJUSTABILITY $\pm 25^\circ$ tilt

DIMMABLE Triac and ELV

DAMP LOCATION UL Listed

LIFE SPAN 50,000 hours L70

COMPATIBILITY EL971ICA, EL971RICA




Medium Base Housings & Trims


5" Sloped Ceiling Housings & Trims	16
6" Sloped Ceiling Housings & Trims	18
6" Super Sloped Ceiling Housings & Trims	22

Medium Base Housing and Trims

Medium base housings are UL rated as IC Airtight for use in insulated ceilings. They can be used with LED or traditional medium base lamps.

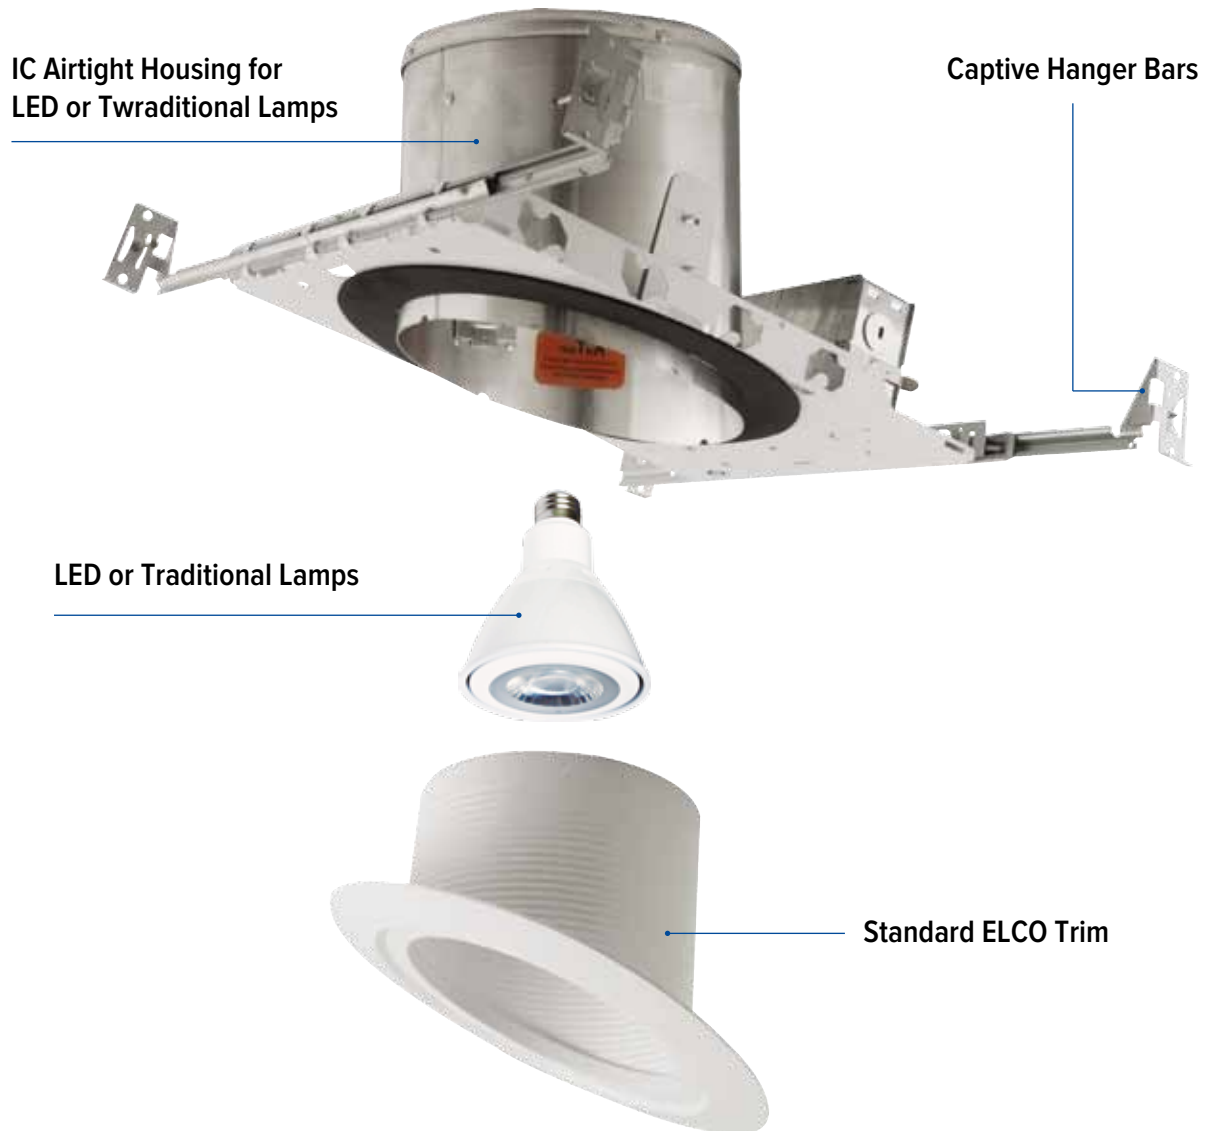

Recessed downlighting has quickly become the most elegant way to add lighting to a vaulted or sloped ceiling. ELCO Lighting's Slant product family is designed specifically for sloped ceilings. Slant's innovative-patented solution allows for installation in sloped ceilings ranging from 2/12 (10°) to 12/12 (45°).

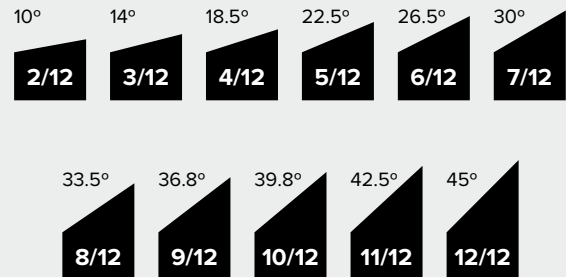

5" Sloped Ceiling Medium Base **IC Housing**



EL518ICA

5" IC Airtight New Construction

Can be used in insulated ceilings with lamps up to 75W.
Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 2/12 to 6/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

THERMAL PROTECTOR GUARDS Protection against improper lamping

CAPTIVE HANGER BARS Span up to 24" joists with Real Nail

7 1/2" HEIGHT Allows for use in 2" x 8" construction

ALUMINUM CONSTRUCTION Single Wall Housing

SOCKET Medium base E26


DAMP LOCATION UL Listed

FEED THROUGH UL Listed

DIRECT CONTACT WITH INSULATION UL Listed

AIRTIGHT Per ASTM E-283

LAMPS Medium Base Incandescent or LED Lamp MAX. 75W

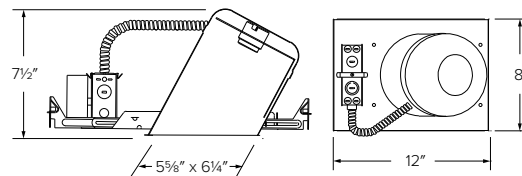

EL518RICA

5" IC Airtight Remodel

Can be used in insulated ceilings with lamps up to 75W.
Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 2/12 to 6/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

THERMAL PROTECTOR GUARDS Protection against improper lamping

7 1/2" HEIGHT Allows for use in 2" x 8" construction

SOCKET Medium base E26


DAMP LOCATION UL Listed

FEED THROUGH UL Listed

DIRECT CONTACT WITH INSULATION UL Listed

AIRTIGHT Per ASTM E-283

LAMPS Medium Base or LED Incandescent Lamp MAX 75W

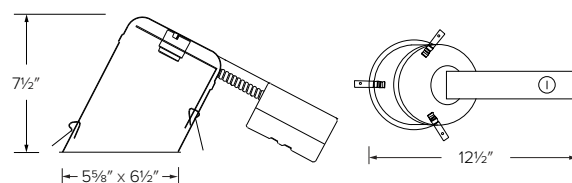

5" Sloped Ceiling Trims



Baffle Trim

EL550W White
EL550B Black
 Lamp: 75W MAX. PAR30
 O.D.: 7 1/8" x 7 1/2"



Reflector Trim

EL555W White
EL555B Black
EL555C Clear
 Lamp: 75W MAX. PAR30
 O.D.: 7 1/8" x 7 1/2"



Regressed Eyeball with Reflector Trim

EL519WW-OM5W White
EL519BB-OM5W Black
 White Metal Trim Ring
 Lamp: 75W MAX. PAR30
 O.D.: 7 1/4"



Regressed Albalite Lens with Reflector Trim

ELS542W-OM5W White
ELS542B-OM5W Black
ELS542C-OM5W Clear
ELS542G-OM5W Gold
 White Metal Trim Ring
 Lamp: 60W A19
 O.D.: 7 1/4"



Regressed Albalite Lens with Baffle Trim

EL542W-OM5W White
EL542B-OM5W Black
 White Metal Trim Ring
 Lamp: 60W A19
 O.D.: 7 1/4"



Regressed Drop Opal Lens with Baffle Trim

EL546W-OM5W White
EL546B-OM5W Black
 White Trim Ring
 Lamp: 60W A19
 O.D.: 7 1/4"



Regressed Eyeball with Baffle Trim

EL575W-OM5W White
EL575B-OM5W Black
 White Metal Trim Ring
 Lamp: 75W PAR30
 O.D.: 7 1/4"



Adjustable Gimbal with Baffle

EL576W-OM5W White
EL576B-OM5W Black
 Lamp: 75W PAR30
 O.D.: 7 1/4"
 U.S. PATENT NO. 6364511



Baffle with Gimbal

EL560W White
EL560B Black
EL560BZ Bronze
 Lamp: 75W MAX. PAR30
 O.D.: 7 1/4"



Reflector with Gimbal

EL561W White
EL561C Clear
EL561B Black
 Lamp: 75W MAX. PAR30
 O.D.: 7 1/4"



Adjustable Gimbal with Reflector

EL577W-OM5W White
EL577B-OM5W Black
EL577C-OM5W Clear
EL577G-OM5W Gold
 White Metal Trim Ring
 Lamp: 75W PAR30
 O.D.: 7 1/4"



Baffle with Adjustable Lamp Holder

ELM531KW White
ELM531KB Black
 Lamp: 75W PAR30
 O.D.: 7 1/4"
 U.S. PATENT NO. 6364511



Reflector with Adjustable Lamp Holder

ELS531KW White
ELS531KB Black
ELS531KC Clear
ELS531KG Gold
 Lamp: 75W PAR30
 O.D.: 7 1/4"
 U.S. PATENT NO. 6364511

6" Sloped Ceiling Medium Base IC Housing




EL936ICA

6" IC Airtight Double Wall New Construction

Can be used in insulated ceilings with lamps up to 90W.
Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC
CEILING SLOPES Pitch range from 2/12 to 6/12
JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable
THERMAL PROTECTOR GUARDS Protection against improper lamping
CAPTIVE HANGER BARS Span up to 24" joists with Real Nail
7 1/2" HEIGHT Allows for use in 2" x 8" construction
ALUMINUM CONSTRUCTION Double Wall Housing
DAMP LOCATION UL Listed
FEED THROUGH UL Listed
DIRECT CONTACT WITH INSULATION UL Listed
AIRTIGHT Per ASTM E-283
LAMPS Medium Base Incandescent or LED Lamp MAX 90W




EL918ICA

6" IC Airtight Single Wall New Construction

Can be used in insulated ceilings with lamps up to 75W.
Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC
CEILING SLOPES Pitch range from 2/12 to 6/12
JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable
THERMAL PROTECTOR GUARDS Protection against improper lamping
CAPTIVE HANGER BARS Span up to 24" joists with Real Nail
7 1/2" HEIGHT Allows for use in 2" x 8" construction
ALUMINUM CONSTRUCTION Single Wall
DAMP LOCATION UL Listed
FEED THROUGH UL Listed
DIRECT CONTACT WITH INSULATION UL Listed
AIRTIGHT Per ASTM E-283
LAMPS Medium Base Incandescent or LED Lamp MAX. 75W
U.S. PATENT NO. 5548499




EL918RICA

6" IC Airtight Remodel

Can be used in insulated ceilings with lamps up to 75W.
Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC
CEILING SLOPES Pitch range from 2/12 to 6/12
JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable
THERMAL PROTECTOR GUARDS Protection against improper lamping
7" HEIGHT Allows for use in 2" x 8" construction
DAMP LOCATION UL Listed
FEED THROUGH UL Listed
DIRECT CONTACT WITH INSULATION UL Listed
AIRTIGHT Per ASTM E-283
LAMPS Medium Base Incandescent or LED Lamp MAX. 75W
U.S. PATENT NO. 5548499



6" Sloped Ceiling Medium Base **Non-IC Housing**



EL900HT

6" Non-IC New Construction

Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 2/12 to 6/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

THERMAL PROTECTOR GUARDS Protection against improper lamping

CAPTIVE HANGER BARS Span up to 24" joists with Real Nail


7 1/2" HEIGHT Allows for use in 2" x 8" construction

DAMP LOCATION UL Listed

FEED THROUGH UL Listed

LAMPS Medium Base Incandescent or LED Lamp MAX. 150W

U.S. PATENT NO. 5548499

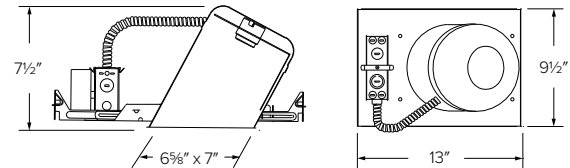

EL900RT

6" Non-IC Remodel

Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 2/12 to 6/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

THERMAL PROTECTOR GUARDS Protection against improper lamping


7 1/2" HEIGHT Allows for use in 2" x 8" construction

DAMP LOCATION UL Listed

FEED THROUGH UL Listed

LAMPS Medium Base Incandescent or LED Lamp MAX. 150W

U.S. PATENT NO. 5548499

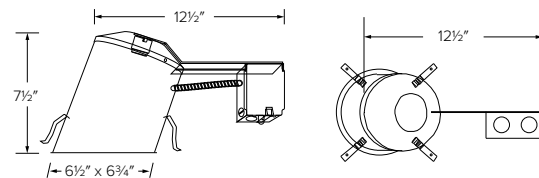

6" Sloped Ceiling Trims



Albalite Shower Trim

EL12W White
EL12B Black
EL12G Gold
EL12N Nickel
EL12BZ Bronze
EL12SH White Lexan Ring

Lamp: 60W MAX. A19
 O.D.: 8"



Albalite Shower Trim

EL12CP Copper
 Lamp: 60W MAX. A19
 O.D.: 8"



Fresnel Shower Trim

EL13W White
EL13B Black
EL13G Gold
EL13N Nickel
EL13BZ Bronze
EL13SH White Lexan Ring

Lamp: 60W MAX. A19
 O.D.: 8"



Fresnel Shower Trim

EL13CP Copper
 Lamp: 60W MAX. A19
 O.D.: 8"



Adjustable Baffle with Reflector Trim

EL601W White
EL601B Black
 Angle: 30° Adjustment
 Lamp: 75W MAX. PAR30 or PAR38
 O.D.: 8"



Adjustable Spot with Baffle Trim

EL610W White
EL610B Black
 Angle: 30° Adjustment
 Lamp: 75W MAX. JDR, 120V MR16
 with PSA28/PSA29, or LED PSA34
 O.D.: 8"



Adjustable Spot with Reflector Trim

EL611W White
EL611B Black
EL611C Clear
EL611G Gold

Angle: 30° Adjustment
 Lamp: 75W MAX. JDR, 120V MR16
 with PSA28/PSA29, or LED PSA34
 O.D.: 8"



Reflector Trim

EL616W White
EL616B Black
EL616C Clear
EL616G Gold

Lamp: 120W MAX. PAR38,
 75W PAR30
 O.D.: 7 3/8" x 7 5/8"



Adjustable Trim with Adjustable Bracket

EL616KC Clear
EL616KW White

Lamp: 120W MAX. PAR38,
 75W PAR30
 O.D.: 7 5/8" x 7 7/8"

6" Sloped Ceiling Trims



Regressed Eyeball Baffle

EL618W White
EL618B Black

Lamp: 75W MAX. PAR30, R30
O.D.: 8"



Regressed Eyeball Reflector

EL619CW Clear with White
EL619WW White with White

Lamp: 75W MAX. PAR30, R30
O.D.: 8"



Phenolic Baffle

EL622W White
EL622B Black
EL622BG Black with Gold Ring

Lamp: 120W MAX. PAR38 or 75W PAR30
O.D.: 7 5/8" x 7 7/8"



Phenolic Baffle with Adjustable Lamp Holder

EL622KW White
EL622KB Black
EL622KBZ Bronze
EL622KBB All Black
EL622KBG Black with Gold Ring

Lamp: 120W MAX. PAR38 or 75W PAR30
O.D.: 7 5/8" x 7 7/8"



Phenolic Baffle with Gimbal Ring

EL624W White
EL624B Black

Lamp: 75W PAR30
O.D.: 7 5/8" x 7 7/8"



Phenolic Baffle with Gimbal Ring

EL626W White
EL626B Black

Lamp: 120W MAX. PAR38
O.D.: 7 1/16" x 7 3/8"



Reflector with Albalite Lens Trim

EL642G Gold
EL642B Black
EL642C Clear
EL642W White

Lamp: 60W MAX. A19
O.D.: 8"

6" Super Sloped Ceiling Medium Base IC Housing





EL946ICA

6" IC Airtight Double Wall New Construction

Can be used in insulated ceilings with lamps up to 90W.
Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC
CEILING SLOPES Pitch range from 7/12 to 12/12
JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable
THERMAL PROTECTOR GUARDS Protection against improper lamping
CAPTIVE HANGER BARS Up to 24" Joists with Real Nail
7 1/2" HEIGHT Allows for use in 2" x 8" construction
ALUMINUM CONSTRUCTION Double Wall Housing
DAMP LOCATION UL Listed
FEED THROUGH UL Listed
DIRECT CONTACT WITH INSULATION UL Listed
AIRTIGHT Per ASTM E-283
LAMPS Traditional or LED PAR30/PAR38 MAX. 90W

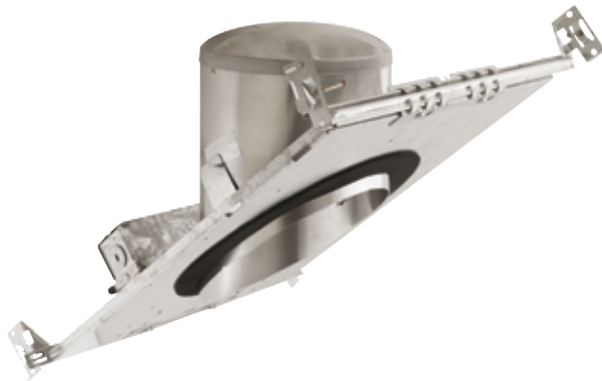


EL901ICA

6" IC Airtight Single Wall New Construction

Can be used in insulated ceilings with lamps up to 75W.
Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC
CEILING SLOPES Pitch range from 7/12 to 12/12
JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable
THERMAL PROTECTOR GUARDS Protection against improper lamping
CAPTIVE HANGER BARS Up to 24" Joists with Real Nail
7 1/2" HEIGHT Allows for use in 2" x 8" construction
ALUMINUM CONSTRUCTION Single Wall Housing
DAMP LOCATION UL Listed
FEED THROUGH UL Listed
DIRECT CONTACT WITH INSULATION UL Listed
AIRTIGHT Per ASTM E-283
LAMPS Traditional or LED PAR30/PAR38 MAX. 75W




EL901RICA


6" IC Airtight Remodel

Can be used in insulated ceilings with lamps up to 75W.
Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC
CEILING SLOPES Pitch range from 7/12 to 12/12
JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable
THERMAL PROTECTOR GUARDS Protection against improper lamping
7 1/2" HEIGHT Allows for use in 2" x 8" construction
DAMP LOCATION UL Listed
FEED THROUGH UL Listed
DIRECT CONTACT WITH INSULATION UL Listed
AIRTIGHT Per ASTM E-283
LAMPS Traditional or LED PAR30/BR30/PAR38 MAX 75W

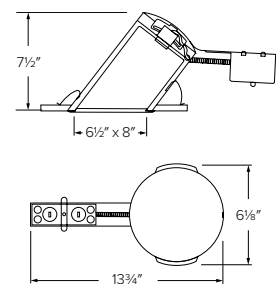

6" Super Sloped Ceiling Medium Base **Non-IC Housing**

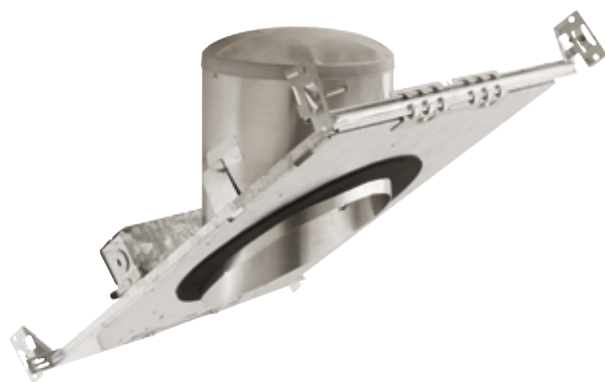

EL901HT

6" Non-IC New Construction

Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 7/12 to 12/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable

THERMAL PROTECTOR GUARDS Protection against improper lamping


CAPTIVE HANGER BARS Span up to 24" joists with Real Nail

7 1/2" HEIGHT Allows for use in 2" x 8" construction

DAMP LOCATION UL Listed

FEED THROUGH UL Listed

LAMPS Traditional or LED PAR30/PAR38 MAX. 90W. R30 MAX. 85W

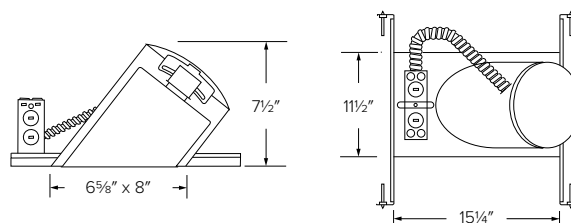

EL901RT

6" Non-IC Remodel

Fits in 2" x 8" joist construction.

INPUT VOLTAGE 120V AC

CEILING SLOPES Pitch range from 7/12 to 12/12

JUNCTION BOX Listed for Through Branch circuit wiring with five 1/4" knockouts and 4 true pryout slots for romex cable


THERMAL PROTECTOR GUARDS Protection against improper lamping

7 1/2" HEIGHT Allows for use in 2" x 8" construction

DAMP LOCATION UL Listed

FEED THROUGH UL Listed

LAMPS Traditional or LED PAR30/PAR38 MAX. 90W. R30 MAX. 85W

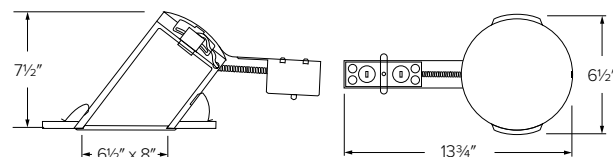

6" Super Sloped Ceiling Trims



Baffle Trim

EL602W White

EL602B Black

Lamp: 90W MAX. PAR30/PAR38, 75W BR30



Reflector Trim

EL606W White

EL606B Black

EL606C Clear

EL606G Gold

Lamp: 90W MAX. PAR30/PAR38, 75W BR30



Baffle Trim with PAR30 Gimbal

EL603W White

EL603B Black

Lamp: 75W MAX. PAR30



Reflector Trim with PAR30 Gimbal

EL604W White

EL604B Black

EL604C Clear

EL604G Gold

Lamp: 75W MAX. PAR30



Baffle Trim with PAR38 Gimbal

EL607W White

EL607B Black

Lamp: 90W MAX. PAR38



Reflector Trim with PAR38 Gimbal

EL608W White

EL608B Black

EL608C Clear

EL608G Gold

Lamp: 90W MAX. PAR38

Accessories



PAR30FSLD

PAR30 LED Lamp

11W PAR30 LED lamp with medium base. 800 lm, 3000K, CRI 90, dimmable, flood beam, 120V.



PAR30FLD

Long Neck PAR30 LED Lamp

10W Long Neck PAR30 LED lamp with medium base. 800 lm, 3000K, CRI 90, dimmable, flood beam, 120V.



PAR38FLD

PAR38 LED Lamp

17W PAR38 LED lamp with medium base. 1200 lm, 3000K, CRI 90, dimmable, flood beam, 120V.



PAR20FLD

PAR20 LED Lamp

7W PAR20 LED lamp with medium base. 470 lm, 3000K, CRI 90, dimmable, flood beam, 120V.



PSA34

LED Lamp

7W LED COB lamp with medium base socket. 500 lm, 3000K, CRI 90, dimmable, 120V.



PSA37

Quick Connect LED MR16 Lamp

7W LED COB lamp with quick connector. 500 lm, 3000K, CRI 90, dimmable, 120V.



MR120-GU10LD

LED GU10 Lamp

7W, 500 lm, 3000K, CRI 90, 120V, dimmable.



PSA30

Socket Adaptor


Socket adaptor E26 to quick connector.

5" Slope Baffle Insert

Multiplier: 3000K (x 0.96)

PHOTOMETRIC REPORT

Product #: EL51127 with EL590ICA
Input Watts: 15W
Luminaire LPW: 70 lm/W

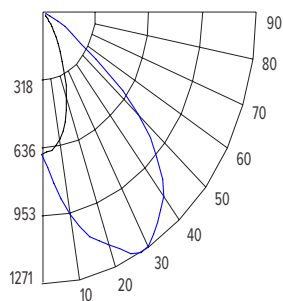

CANDLEPOWER SUMMARY

Degrees Vertical	0°
0	668.55
5	803.13
15	1089.94
25	1245.40
35	1198.76
45	961.26
55	389.73
65	105.60
75	1.61
85	0
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	41.8	4.2'
6'	18.6	6.3'
8'	10.4	8.4'
10'	6.69	10.5'

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	467.83	44.90%
0-40°	726.75	69.70%
0-60°	1019.96	97.90%
0-90°	1042.37	100.00%

5" Slope Reflector Insert

Multiplier: 3000K (x 0.96)

PHOTOMETRIC REPORT

Product #: EL51227 with EL590ICA
Input Watts: 15W
Luminaire LPW: 70 lm/W



CANDLEPOWER SUMMARY

Degrees Vertical	0°
0	703.73
5	845.39
15	1147.30
25	1310.94
35	1261.85
45	1011.85
55	410.24
65	111.16
75	1.69
85	0
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	44	4.2'
6'	19.5	6.3'
8'	11	8.4'
10'	7.04	10.5'

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	492.2	44.90%
0-40°	764.6	69.70%
0-60°	1072.9	97.90%
0-90°	1096.5	100.00%

6" Slope Baffle Insert

Multiplier: 3000K (x 0.96) - 1150 lm (x 1.09)

PHOTOMETRIC REPORT

Product #: EL71327 with EL970ICA
Input Watts: 18W
Luminaire LPW: 64 lm/W



CANDLEPOWER SUMMARY

Degrees Vertical	0°
0	732.29
5	879.62
15	1193.75
25	1364.02
35	1312.95
45	1052.82
55	426.85
65	115.66
75	1.76
85	0
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	45.8	4.2'
6'	20.3	6.3'
8'	11.4	8.4'
10'	7.32	10.5'

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	512.1	44.9%
0-40°	795.5	69.7%
0-60°	1116.3	97.9%
0-90°	1140.9	100%

6" Slope Reflector Insert

Multiplier: 3000K (x 0.96) - 1150 lm (x 1.09)

PHOTOMETRIC REPORT

Product #: EL71527 with EL970ICA
Input Watts: 18W
Luminaire LPW: 64 lm/W



CANDLEPOWER SUMMARY

Degrees Vertical	0°
0	770.75
5	925.90
15	1256.57
25	1436.79
35	1382.03
45	1108.22
55	449.31
65	121.75
75	1.85
85	0
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	48.2	4.2'
6'	21.4	6.3'
8'	12	8.4'
10'	7.71	10.5'

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	539	44.9%
0-40°	837.4	69.7%
0-60°	1175.1	97.9%
0-90°	1200.9	100%

6" Super Slope Baffle Insert

Multiplier: 3000K (x 0.96) - 1150 lm (x 1.09)

PHOTOMETRIC REPORT

Product #: EL76327 with EL971ICA
Input Watts: 18W
Luminaire LPW: 64 lm/W



CANDLEPOWER SUMMARY

Degrees Vertical	0°
0	446.89
5	615.517
15	1833.96
25	3833.65
35	3544.58
45	996.43
55	109.58
65	17.80
75	2.31
85	7
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	27.9	1.8'
6'	12.4	2.8'
8'	6.98	3.7'
10'	4.47	4.6'

ZONAL LUMEN SUMMARY


Zone	Lumens	%Luminaire
0-30°	321.4	44.9%
0-40°	521.0	69.7%
0-60°	893.5	97.9%
0-90°	1057.2	100%

6" Super Slope Reflector Insert

Multiplier: 3000K (x 0.96) - 1150 lm (x 1.09)

PHOTOMETRIC REPORT

Product #: EL76127 with EL971ICA
Input Watts: 18W
Luminaire LPW: 64 lm/W



CANDLEPOWER SUMMARY

Degrees Vertical	0°
0	470.40
5	647.90
15	1930.45
25	4035.35
35	3731.07
45	1048.85
55	115.351
65	18.735
75	2.43
85	0
90	0

ILLUMINANCE AT A DISTANCE

Distance to Target Plane	Footcandles Beam Center	Beam Diameter
4'	29.4	1.8'
6'	13.1	2.8'
8'	7.35	3.7'
10'	4.70	4.7'

ZONAL LUMEN SUMMARY

Zone	Lumens	%Luminaire
0-30°	591.5	49.6%
0-40°	963.2	80.80%
0-60°	1180.4	99.1%
0-90°	1191.6	100%

CAT1040



Customer Service

800.522.2626
customerservice@elcolighting.com
sales@elcolighting.com

Corporate Headquarters

2042 East Vernon Avenue
Los Angeles, CA 90058
Telephone 323-231-2600
elcolighting.com

Printed in the USA
\$15.00

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks used herein are recognized trademarks of their respective companies.

Products shown in this brochure may be covered by U.S. and international patents.
Specifications subject to change without notice.

