

5" E26 MEDIUM BASE
SLOPED CEILING

75W, 120V

THE SLANT™ SYSTEM

ELCO Slant allows for installation in sloped ceilings ranging from 2/12 (10°) to 6/12 (26.5°). Can be used in insulated ceilings. Fits in 2" x 8" joist construction.



FEATURES


- Thermal Protector guards against improper lamping.
- Airtight Slope IC New Construction Housing.
- Single wall aluminum construction for use in insulated ceilings.
- For use with Medium Base Incandescent, X or LED lamps.
- Designed for use in 2/12 to 6/12 sloped ceilings.

SPECIFICATIONS

Wattage	75W
Voltage	120V
Lamp Type	Medium Base (E26) 75W MAX PAR30 or LED
Damp Location	Listed
Wet Location	Listed with Wet Location Trims
Sloped Pitch Range	10° 14° 18.5° 22.5° 26.5° 2/12 3/12 4/12 5/12 6/12

SET UP

1. Select a New Construction or Remodel Housing.
2. Select a Trim.

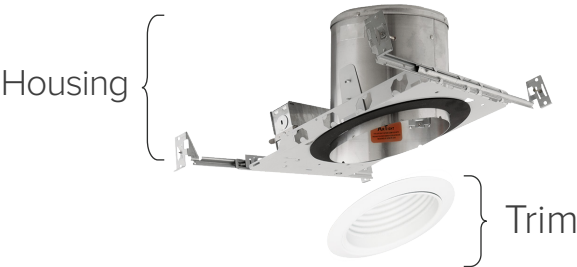

Finishes	White
	Black
	Clear
	Black/White
	Clear/ White
	Gold

PRODUCT NUMBER BUILDER

STEP 1. Specify Housing part number (Select one)

Example: EL518ICA

IC SLOPE HOUSINGS

ITEM	APPLICATION		HOUSING		
EL					
EL	518	New Construction (75W)	(Blank) R	Single Wall Remodel	ICA IC Airtight

PRODUCT NUMBER BUILDER

STEP 2. Specify Trim part number (Select one)

5" SLANT™ SLOPED TRIMS



Style: **Adjustable Baffle with Socket Bracket**
Item: **ELM531KW** (All White)
ELM531KB (Black/White Ring)



Style: **Adjustable Gimbal Ring with Reflector**
Item: **EL577W-OM5W** (All White)
EL577B-OM5W (All Black)



Style: **Adjustable Gimbal with Baffle**
Item: **EL576W-OM5W** (All White)
EL576B-OM5W (All Black)



Style: **Adjustable Reflector with Socket Bracket**
Item: **ELS531KW** (All White)
ELS531KB (Black/White Ring)
ELS531KC (Clear/White Ring)



Style: **Baffle**
Item: **EL550W** (All White)
EL550B (Black/White Ring)




Style: **Baffle with Adjustable Gimbal Ring**
Item: **EL560W** (All White)
EL560B (All Black)



Style: **Reflector**
Item: **EL555W** (All White)
EL555B (All Black)
EL555B (Clear/White Ring)



Style: **Reflector with Adjustable Gimbal Ring**
Item: **EL561W** (All White)
EL561C (Clear)



Style: **Regressed Albalite Lens with Baffle**
Item: **EL542B-OM5W** (All Black)



Style: **Regressed Albalite Lens with Reflector**
Item: **ELS542W-OM5W** (All White)
ELS542B-OM5W (All Black)
ELS542C-OM5W (Clear)
ELS542G-OM5W (Gold)



Style: **Regressed Eyeball with Reflector**
Item: **EL519BB-OM5W** (All Black)




Style: **Regressed Fresnel Lens with Baffle**
Item: **EL543W-OM5W** (All White)
EL543B-OM5W (All Black)

PRODUCT DIMENSIONS

SLANT™ SLOPED TRIMS



ELM531K - 5" ADJUSTABLE BAFFLE WITH SOCKET BRACKET

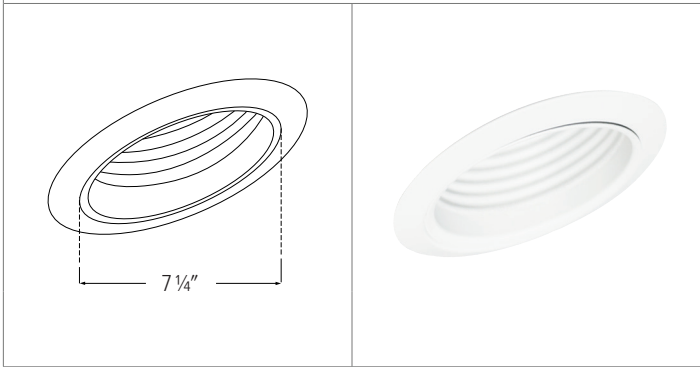

W (All White)

B (Black/White)


EL577-OM5W - 5" ADJUSTABLE GIMBAL RING WITH REFLECTOR

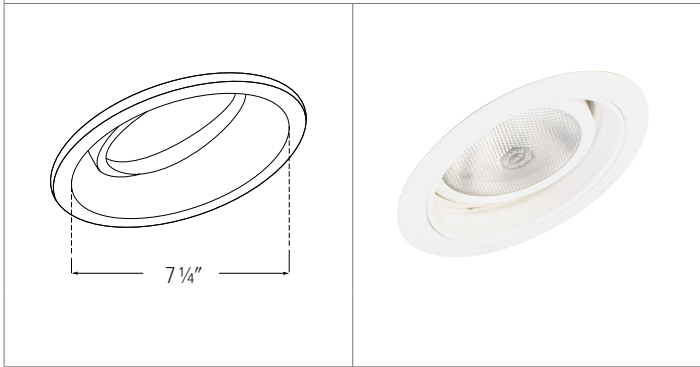

W (All White)

BB (All Black)


EL576-OM5W - 5" ADJUSTABLE GIMBAL WITH BAFFLE

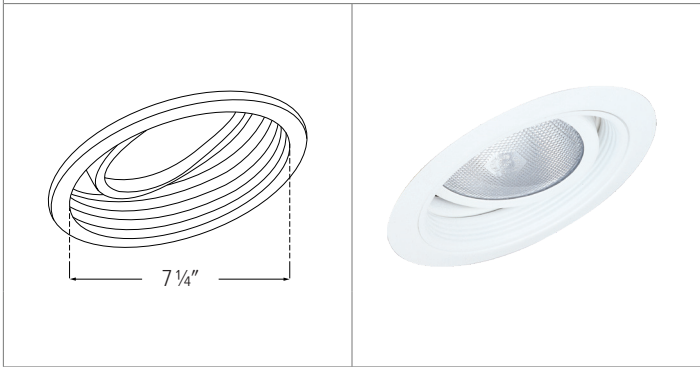

W (All White)

B (All Black)

ELS531K - 5" ADJUSTABLE REFLECTOR WITH SOCKET BRACKET


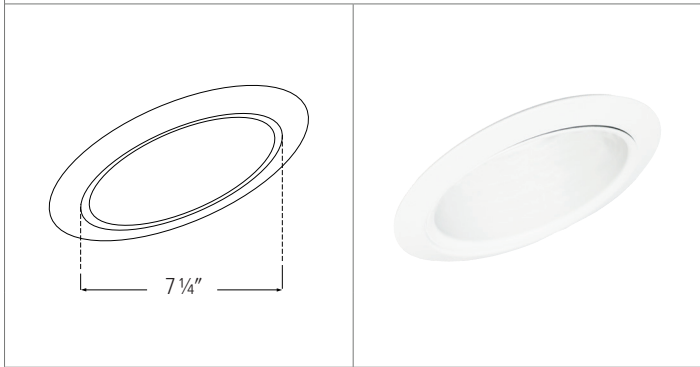


W (All White)

B (Black/White)

C (Clear/White)



EL550 - 5" BAFFLE

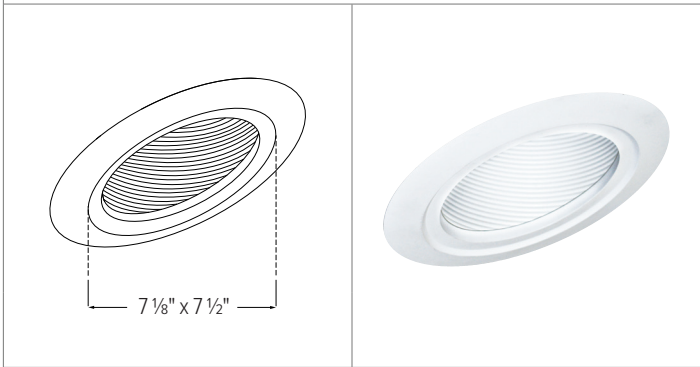

W (All White)

B (Black/White)

EL560 - 5" BAFFLE WITH ADJUSTABLE GIMBAL RING

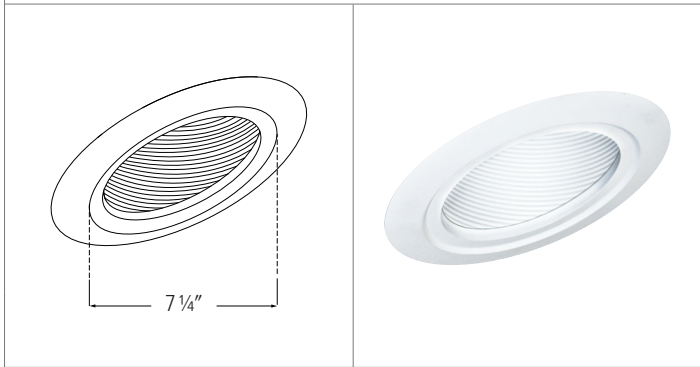


W (All White)

B (Black/White)

PRODUCT DIMENSIONS

SLANT™ SLOPED TRIMS

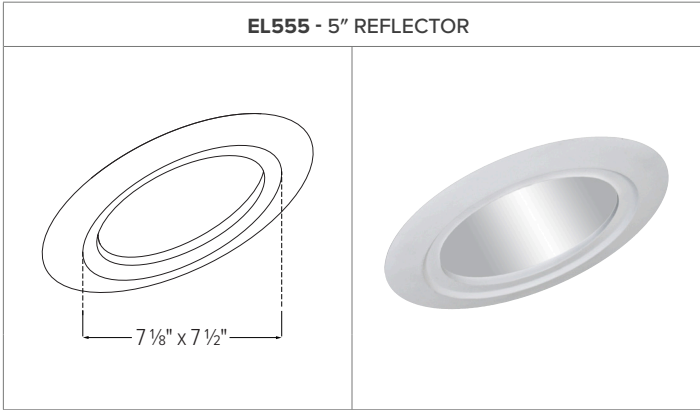


W (All White)



B (All Black)




C (Clear/White)

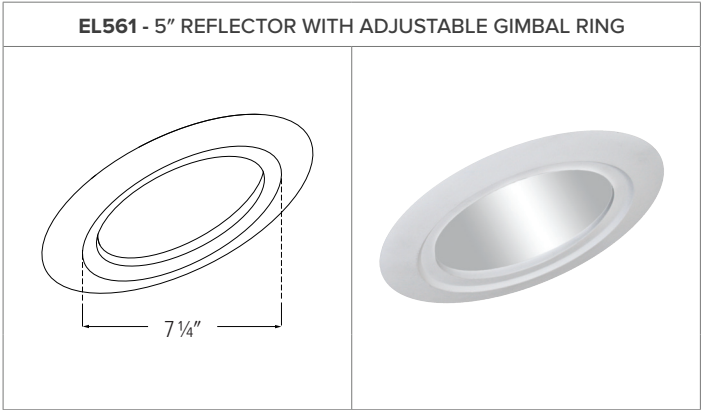


W (All White)



C (Clear)

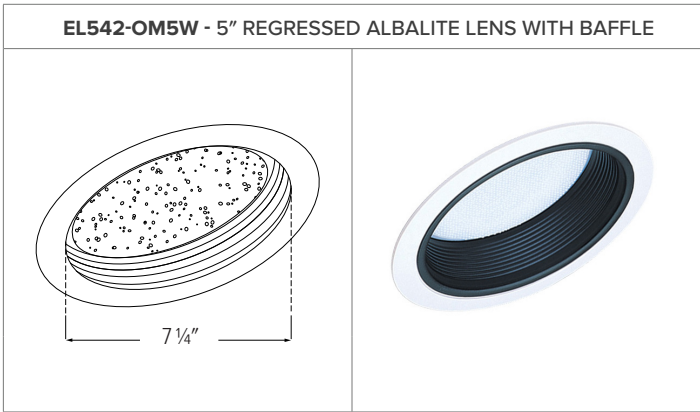

B (All Black)

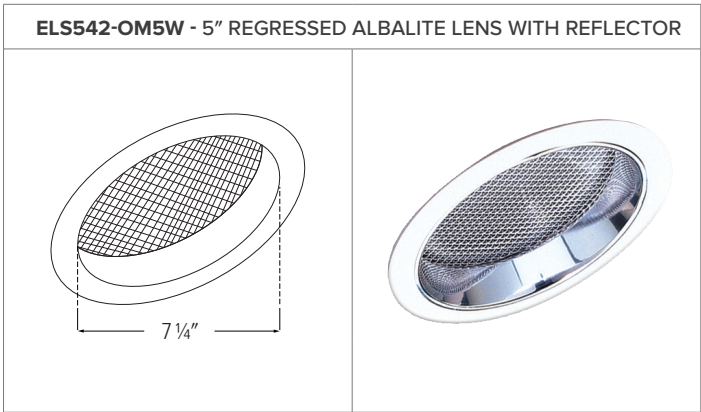

W (All White)




B (All Black)




C (Clear)



G (Gold)

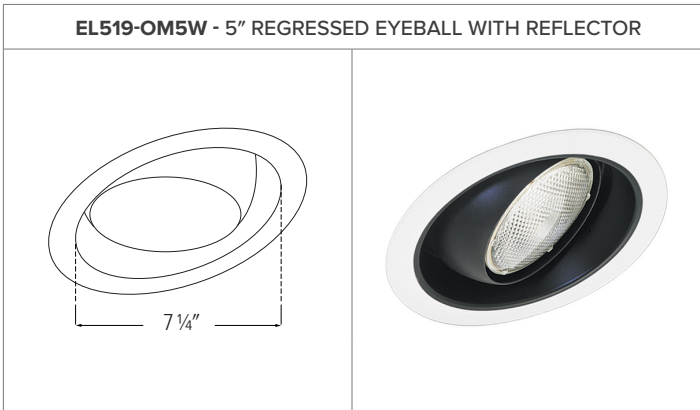

BB (All Black)

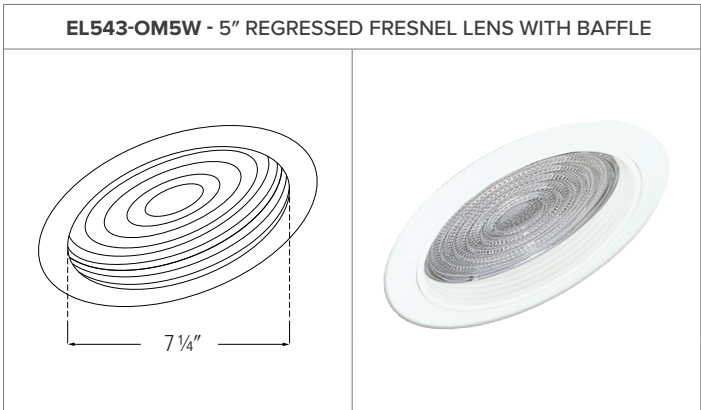

W (All White)



B (All Black)

TECHNICAL DETAILS

Construction: IC Rated for Direct Contact with Insulation. Designed for use in 2/12 to 6/12 sloped ceiling. Housing adjusts in frame to accommodate up to 1 1/4" ceiling thickness. Aluminum housing for greater heat dissipation. Stamped galvanized steel frame.

Construction (Trims): Meticulously manufactured trim with a powder coated or anodized finish. Baffle helps reduce glare. Integral gimbal ring holds lamp and allows for 35° internal adjustability while keeping a flush look on the ceiling. Diecast trim ring for durability and lasting quality.

Installation: Designed for ceiling plenums where 2x8 joists or taller are used. High strength hanger bars can easily be nailed to joists. Template for hole cutout is provided with each housing. Suitable for T-grid and drop ceiling applications. See installation sheet for detailed information. Clips securely mount trim into the housing and keeps the ring flush with the ceiling.

Junction Box: Positioned to accommodate straight conduit runs. Seven 1/2" trade size conduit knockouts and one 3/4" knockout. Four true pry-out knockout slots for easy Romex installation.

Hanger Bars: Pre-installed hanger bars with True Nail for easy installation in regular lumber, engineered lumber, and laminated beams. Integral T-bar slots for easy installation in T-bars. Spans up to 24" and can be repositioned 90°. Score lines for tool-free hanger bar size reduction. Integral leveling flange for single-person installation and alignment with joists.

Electrical: Rated for 120V or 277V input. For 277V step down to 120V housing consult factory.

Trims: Compatible with ELCO 5" Line Voltage Slope PAR trims.

Lamp: Designed for use with Medium Base (E26) PAR lamps up to 75W.

Listings: cUL Listed for Damp Location, Direct Contact with Insulation and Combustible Material, and Feed Through, and is AirTight per ASTM E-283.

DIMMER COMPATIBILITY CHART

FOR REFERENCE ONLY

Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards. Consult the dimmer manufacturer prior to installation to ensure compatibility.

MANUFACTURER	PRODUCT	PART NUMBER	DIMMED LIGHT OUTPUT RANGE
Eaton	Decorator Single Pole/3-Way dimmer	DLC03P	10% - 100%
Leviton	Decora SureSlide® Single Pole Slide-To-Off with Optional Locator Light	6631	10% - 100%
	Decora SureSlide® Single Pole/3-Way with Preset ON/OFF switch and Optional Locator Light	6633	10% - 100%
	Universal Decora Dimmable LED, CFL and Incandescent SureSlide Slide Dimmer	6672	10% - 100%
	Decora SureSlide® Universal Dimmer	6674	10% - 100%
Lutron	Skylark® Contour single pole, incandescent / halogen dimmer	CT-600P	5% - 85%
	Skylark® Contour 3-Way, incandescent / halogen "eco-dim" dimmer	CT-603PG	10% - 100%
	Diva® (gloss) single pole, incandescent / halogen, preset dimmer	DV-600P	10% - 100%
	Diva® (gloss) 3-way, incandescent / halogen, preset dimmer	DV-603P	10% - 100%
	Diva® (gloss) C•L single pole/3-Way dimmer	DVCL-153P	5% - 86%
	Maestro® C•L single pole/3-Way/multi-location dimmer	MACL-153M	10% - 100%
	Skylark® Series Dual Slide-to-Off dimmer	S-2	10% - 100%
	Skylark® single pole, incandescent/halogen, slide-to-off dimmer	S-600	10% - 100%
	Ariadni®/Toggler® Series 150W Single Pole/3-Way dimmer	TGCL-153P	5% - 86%

***NOTE: Refer to dimmer manufacturer's documentation for installation instructions and circuit details**

Disclaimer: Minimum and maximum loads for LEDs and CFLs are given in number of lamps and may vary depending on the lamp being used. Testing conducted by ELCO Lighting is not a substitute for and does not imply certification by an independent laboratory or any other standards certification. Refer to manufacturer specifications for more detailed information on product certifications and standards.

Integrating our lighting with your Smart Home System is a breeze. Simply check your Smart Home system for compatible smart switches and cross reference that with our Dimming Compatibility Chart. Once the switches are integrated with your Smart Home system your lights will be ready to go.

